

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72
Астана (7172)727-132
Астрахань (8512)99-46-04
Барнаул (3852)73-04-60
Белгород (4722)40-23-64
Брянск (4832)59-03-52
Владивосток (423)249-28-31
Волгоград (844)278-03-48
Вологда (8172)26-41-59
Воронеж (473)204-51-73
Екатеринбург (343)384-55-89

Иваново (4932)77-34-06
Ижевск (3412)26-03-58
Казань (843)206-01-48
Калининград (4012)72-03-81
Калуга (4842)92-23-67
Кемерово (3842)65-04-62
Киров (8332)68-02-04
Краснодар (861)203-40-90
Красноярск (391)204-63-61
Курск (4712)77-13-04
Липецк (4742)52-20-81

Магнитогорск (3519)55-03-13
Москва (495)268-04-70
Мурманск (8152)59-64-93
Набережные Челны (8552)20-53-41
Нижний Новгород (831)429-08-12
Новокузнецк (3843)20-46-81
Новосибирск (383)227-86-73
Омск (3812)21-46-40
Орел (4862)44-53-42
Оренбург (3532)37-68-04
Пенза (8412)22-31-16

Пермь (342)205-81-47
Ростов-на-Дону (863)308-18-15
Рязань (4912)46-61-64
Самара (846)206-03-16
Санкт-Петербург (812)309-46-40
Саратов (845)249-38-78
Севастополь (8692)22-31-93
Симферополь (3652)67-13-56
Смоленск (4812)29-41-54
Сочи (862)225-72-31
Ставрополь (8652)20-65-13

Сургут (3462)77-98-35
Тверь (4822)63-31-35
Томск (3822)98-41-53
Тула (4872)74-02-29
Тюмень (3452)66-21-18
Ульяновск (8422)24-23-59
Уфа (347)229-48-12
Хабаровск (4212)92-98-04
Челябинск (351)202-03-61
Череповец (8202)49-02-64
Ярославль (4852)69-52-93

Единый адрес: kwg@nt-rt.ru | <http://kitagawa.nt-rt.ru>

OXYGEN GAS DETECTOR/ALARM SYSTEM

Alarm Meter (for Oxygen)

Indoors


Oxygen

OA-480



Point

■ The OA-480 used in combination with below gas detectors.

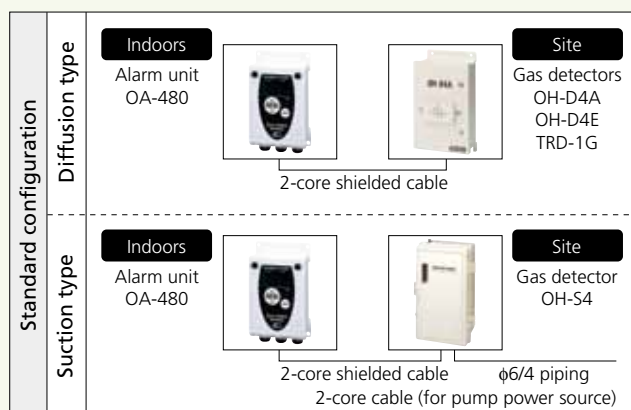

Gas Detectors (for Oxygen)

Site

Oxygen

OH-D4A

(non Ex · diffusion type)



OH-D4E

(intrinsic safe · diffusion type)



TRD-1G

(flame proof type · diffusion type)



OH-S4

(non Ex · suction type)



Specification

Model	OA-480
Measuring gas	Oxygen
Detection method	Galvanic cell
Measuring range	0.0~25.0vol%
Alarm setting value	Adjustable (standard:18.0vol%)
Detectable accuracy	±0.7vol%
Alarm accuracy	±0.7vol%
Alarm display	Intermittent red LED light and intermittent buzzer sound
Alarm contact output	Non-voltage 1a or 1b contact (option)
Contact capacity	AC125V · 0.6A or DC110V · 0.6A, DC30V-2A (resistance load)
Trouble display	Red LED light and intermittent buzzer sound
Analogue output	DC4~20mA
Power source	AC100V±10% 50/60Hz 1φ
Power consumption	Diffusion type; approx. 5VA, Suction type; approx. 20VA
Operating temperature	-10~40°C; below 95%RH (non-condensing)
Dimensions	120 (W)×197 (H)×65 (D) mm
Weight	Approx. 0.9kg

Specification

Model	OH-D4A	OH-D4E	TRD-1G	OH-S4
Sensor model	OC-6B			
Detection method	Galvanic cell			
Sampling method	Diffusion			Suction
Explosion-proof	—	ExiadtIICT4	d3aG4	—
Combination	OA-480, KA-704R/G, KA-708R/G, KU-7R/G			
Dimensions (mm)	92 (W) 160 (H) 70 (D)	92 (W) 160 (H) 70 (D)	220 (W) 116 (H) 122 (D)	225 (W) 350 (H) 160 (D)
Weight	0.7Kg	0.7Kg	4Kg	2.4Kg