

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72 Астана (7172)727-132 Астрахань (8512)99-46-04 Барнаул (3852)73-04-60 Белгород (4722)40-23-64 Брянск (4832)59-03-52 Владивосток (423)249-28-31 Волгоград (844)278-03-48 Вологда (8172)26-41-59 Воронеж (473)204-51-73 Екатеринбург (343)384-55-89	Иваново (4932)77-34-06 Ижевск (3412)26-03-58 Казань (843)206-01-48 Калининград (4012)72-03-81 Калуга (4842)92-23-67 Кемерово (3842)65-04-62 Киров (8332)68-02-04 Краснодар (861)203-40-90 Красноярск (391)204-63-61 Курск (4712)77-13-04 Липецк (4742)52-20-81	Магнитогорск (3519)55-03-13 Москва (495)268-04-70 Мурманск (8152)59-64-93 Набережные Челны (8552)20-53-41 Нижегний Новгород (831)429-08-12 Новокузнецк (3843)20-46-81 Новосибирск (383)227-86-73 Омск (3812)21-46-40 Орел (4862)44-53-42 Оренбург (3532)37-68-04 Пенза (8412)22-31-16	Пермь (342)205-81-47 Ростов-на-Дону (863)308-18-15 Рязань (4912)46-61-64 Самара (846)206-03-16 Санкт-Петербург (812)309-46-40 Саратов (845)249-38-78 Севастополь (8692)22-31-93 Симферополь (3652)67-13-56 Смоленск (4812)29-41-54 Сочи (862)225-72-31 Ставрополь (8652)20-65-13	Сургут (3462)77-98-35 Тверь (4822)63-31-35 Томск (3822)98-41-53 Тула (4872)74-02-29 Тюмень (3452)66-21-18 Ульяновск (8422)24-23-59 Уфа (347)229-48-12 Хабаровск (4212)92-98-04 Челябинск (351)202-03-61 Череповец (8202)49-02-64 Ярославль (4852)69-52-93
---	--	---	--	---

Единый адрес: kwg@nt-rt.ru | http://kitagawa.nt-rt.ru

LIST OF "KITAGAWA" PRECISION DETECTOR TUBES

NOTICE 1

1. In cases where the detector tubes have more than one measuring range, the scale range printed on each detector tube and the number of pump strokes is marked by a circle (○).

Example: Tube No. 102SD Measuring Range (ppm) No. of Pump Strokes

125~5,000	1/2
50~2,000	①
20~800	2

2. The range printed on the tube box shows the range of the minimum and maximum detectable concentrations.

Example: Tube No.102SD 20~5,000

NOTICE 2

In cases where the gas concentration is read by using a conversion chart, as shown in the tube instruction sheet, a © mark is shown after the tube number in this brochure, for example: 190U ©. However, this © mark is shown only in the brochure and does not appear on the printed tube box or in the instruction sheet. When ordering such tubes, it is unnecessary to include the © mark on your purchase order.

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea- suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					

Acetaldehyde CH ₃ CHO Concentration chart method	133A ‡	0.004~ 1.0%	1	Yellow	Pink	Mfg. synthetic rubber, plastics; various organics mfg, perfume, flavors, fragrances	1	10	Acetone (1,400), Acrolein (35), Methyl ethyl ketone (900), Methyl isobutyl ketone (2,900), SO ₂ (10)	50 (J) 20 (B)
Acetaldehyde CH ₃ CHO	133SB ‡	5~140	1	Yellow	Pink	Mfg. synthetic rubber, plastics, various organics	2	10	Other aldehydes, Ethanol	
Acetic acid CH ₃ COOH	216S	1~50	1	Pale pink	Yellow	Mfg. cellulose acetate rayon, vinyl acetate, a seasoning	3	10	SO ₂ (1/20 × Acetic acid *), NO ₂ (10), HCL (2 × Acetic acid *), Cl ₂ (5)	10 (J.A.B)
Acetic anhydride (CH ₃ CO) ₂ O	216S©	1~15	1	Pale pink	Yellow	Acetylating agent	3	10	SO ₂ (1/20 × Acetic acid *), NO ₂ (10), HCl(2 × Acetic acid *), Cl ₂ (5)	5 (J) 1 (A) 0.5 (B)
Acetone CH ₃ COCH ₃	102SA	1.0~ 5.0%	1/2	Orange	Dark brown	Leakage & file hazard detection in acetate rayon industry, paints industry & pharmaceutical industry	3	10	Alcohols, Other Ketones, Aromatic hydrocarbons, Esters, Halogenated hydrocarbons (0.5%)	
		0.1~ 2.0%								
	102SC ‡	0.01~ 4.0%	1	Yellow	Pink		1	10	Acetaldehyde (30), Acrolein (20), Methy ethyl ketone (150), Methyl isobutyl ketone (400)	200 (J.A) 500 (B)
	102SD	125~ 5,000	1/2	Yellow	Dark brown	Industrial hygiene for both plant and laboratory	2	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	
		50~ 2,000 20~800								

‡ This tube must be stored in a refrigerated place (0-10 °C/32-50 °F).

* Interfered by coexistence more than parenthesized rate.

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea- suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
Acetylene HC ≡ CH	101S	50~ 1,000	1	Pale yellow	Brownish blue	Process control & leakage detection in synthetic ammonia plant, cuprammonium rayon process	3	10	Oleffins (10), H ₂ S (10), CO (50), NH ₃ , Butadiene (25), HCH, Cl ₂ , NO ₂ , CS ₂ , Benzene	
Acetylene · Ethylene -separation measurement C ₂ H ₂ & C ₂ H ₄	280S	C ₂ H ₂ ; 20~300 C ₂ H ₄ ; 200~ 2,000	1	Yellow Pale yellow	Dark brown Blue		1	2 × 5	Tube for C ₂ H ₂ ; CO (10), H ₂ (5,000), Ethylene (2,000) Tube for C ₂ H ₄ ; CO (1,350), Acetylene (370), Propylene (20)	
Acrolein (Acryl aldehyde) CH ₂ =CHCHO Concentration chart method	136 ‡	0.005~ 1.8%	1	Yellow	Pink	Leakage & fire hazard detection in plastics industry	1	10	Acetylene (20), Acetaldehyde (70), Methyl ethyl ketone (60), Methy isobutyl ketone (500)	0.1 (J.B)
Acrylic acid CH ₂ =CHCOOH	216S©	1~50	1	Pale pink	Yellow	Material of acrylic resin	3	10	SO ₂ (1/20 × Acetic acid *), NO ₂ (10), HCl (2 × Acetic acid *), Cl ₂ (5)	2 (A)
Acrylonitrile (Vinyl cyanide) CH ₂ =CHCN	128SA	0.1~ 3.5%	1	Orange	Dark green	Leakage & fire hazard detection in synthetic rubber & plastics industry	3	10	Acetylene (3%), Propane (0.2%), Other organic gases or vapours except Halogenated hydrocarbons (50)	2 (J.A.B)
	128SB	10~500	1	Yellow	Pale blue	Leakage detection	2	10		
	128SC ‡	1~120	2	Yellow	Pink	Industrial hygiene, human carcinogen: recognized to have carcinogenic potential	1	2 × 5	Methyl ethyl ketone (600), Styrene (250), HCN (2), Butadiene (200)	
	128SD ‡	1~20 0.5~10 0.25~5 0.2~4	① 2 4 5	Yellow	Red		1	2 × 5	HCN	
Allyl alcohol CH ₂ =CHCH ₂ OH	184S©	20~500	1	Yellow	Pale blue	Leakage detection	2	10	Esters, Ketones, Alcohols, Aromatic hydrocarbons, Halogenated hydrocarbons	1 (J) 0.5 (A) 2 (B)
Ammonia NH ₃	105SA	0.5~ 10%	1	Pink	Grey or Yellow	Process control & leakage detection in synthetic ammonia plant, cuprammonium rayon process; fertilizer mfg.	3	10	Amines	25 (J.A.B)
	105SB	50~900	1	Pale purple	Pale yellow	Process control	3	10	SO ₂ (1/4 × NH ₃ *), Cl ₂ (2), Amines	
	105SC	10~260 5~130	① 2	Pale purple	Pale yellow	Synthetic ammonia plant, leakage detection of refrigerant in ice plant, Industrial hygiene	3	10	SO ₂ (1/5 × NH ₃ *), Cl ₂ (2), Amines	
	105SD	1~20 0.5~10 0.2~4	① 2 5	Pale purple	Pale yellow		3	10	Amines	
	105SE	10~200 5~100 1~20	1/2 ① 5	Pale purple	Pale yellow		3	10	Sulphur dioxide, Chlorine, Amines	
	105SH	0.5~ 30%	1	Pink	Blue · Brownish green	Process control & leakage detection in synthetic ammonia plant, cuprammonium rayon process, fertilizer mfg.	3	10	H ₂ S (3,000)	
	105SM	0.1~ 1.0%	1	Pale purple	Pale yellow	Process control	2	10	Amines	
	181S	2~30 1~15	① 2	White	Yellow	Industrial hygiene	3	10	Toluidine (1/3 × Aniline *), NH ₃ , Aliphatic amines or Aromatic amines (the same conc. of Aniline)	1 (J.B) 2 (A)

‡ This tube must be stored in a refrigerated place (0-10 °C/32-50 °F).

* Interfered by coexistence more than parenthesized rate.

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea-suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
Arsine AsH ₃	140SA	5~160	1	White	Dark brown	Doping gas analysis in semiconductor industry, waste gas analysis in metal refinery	2	10	H ₂ S (5), Hydrogen selenide (5), Phosphine (5)	0.01 (J) 0.005 (A) 0.05 (B)
	121U	0.1~2.0 0.05~1.0	① 2	Pale yellow	Pink	Industrial hygiene, semiconductor manufacturing process	2	10	Hydrogen selenide, Mercaptans, H ₂ S, HCN, SO ₂	
Benzene-in the presence of Gasoline and/or other Aromatic hydrocarbons C ₆ H ₆	118SB	5~300	1	White	Greenish brown	Industrial hygiene (suspected carcinogen in humans)	2	2 × 5	Toluene (over 150), Hexane (200), Xylene (over 300)	0.5 (A) 1 (B)
	118SE	1~80 0.2~1	① 5	White	Greenish brown		2	2 × 5	Toluene (1,000), Xylene (1,000), Ethyl benzene (1,000), CO (2), Hexane (2)	
Benzene C ₆ H ₆	118SC	4~100 2~50 1~25	1 ② 4	White	Greenish brown	Industrial hygiene (suspected carcinogen in humans)	2	10	Toluene, Xylene, CO (50), Hexane (100)	0.5 (A) 1 (B)
	118SD	1~75 0.2~15 0.1~7.5	1 ⑤ 10	White	Greenish brown		2	2 × 5	Toluene, Xylene, CO (2.0), Hexane (2.0)	
Bromine Br ₂ Concentration chart method	114	1~20	1	White	Orange	Industrial hygiene	2	10	Cl ₂ (1), ClO ₂ , NO ₂	0.1 (J.A.B)
Bromochloromethane CH ₂ BrCl	157SB◎ ‡	2~80 20~400	① 1/2	White	Yellow		3	2 × 5		200 (A)
Bromoform CHBr ₃	157SB◎ ‡	1~20 0.5~9	① 2	White	Yellow		3	2 × 5		1 (J) 0.5 (A)
1-Bromopropane CH ₃ CH ₂ CH ₂ Br	157SB◎ ‡	5~80	1	White	Yellow		3	2 × 5		10 (A)
2-Bromopropane (CH ₃) ₂ CHBr	157SB◎ ‡	5~80	1	White	Yellow		3	2 × 5		1 (J)
1,3-Butadiene CH ₂ =CHCH=CH ₂	168SA	0.03~2.6%	1	Brownish orange	Dark brown	Process control & fire hazard detection in synthetic rubber industry. mfg. synthetic rubber	3	10	Other organic gases or vapours except Halogenated hydrocarbons (50), Propane (0.2%), Acetylene (3%)	2 (A) 10 (B)
	168SB	30~600	1	Pale yellow	White	Leakage detection in synthetic rubber industry	3	10	CO, Butane, Pentane, Ethylene, Propylene, Butylene, H ₂ S, Benzene, NH ₃ , HCN	
	168SC	5~100 2.5~50	① 2	Pale yellow	Pale blue		1	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	
	168SE	0.5~10.0 0.1~2.0	1 ④	Pink	White		3	2 × 5	H ₂ S, Isobutylene, NH ₃	
n-Butane CH ₃ (CH ₂) ₂ CH ₃	221SA	0.05~0.6%	1	Orange	Brown	Combustible gas detection	3	10	Toluene, Hexane, Trichloroethylene	500 (J) 1,000 (A) 600 (B)
1-Butanol (n-Butyl alcohol) CH ₃ CH ₂ CH ₂ CH ₂ OH	190U◎	5~100	3	Yellow	Pale blue	Mfg. flotation reagent, stabilizer for solvent, industrial hygiene	2	10	Alcohols, Esters, Paraffin hydrocarbons, Aromatic hydrocarbons, Ketones, Halogenated hydrocarbons	50 (J) 20 (A)
2-Butanol (sec-Butyl alcohol) CH ₃ CH ₂ CH(OH)CH ₃	189U	10~300 4~120	② 4	Yellow	Pale blue	Organic solvent treating, industrial hygiene	2	10	Alcohols, Esters, Paraffin hydrocarbons, Aromatic hydrocarbons, Ketones, Halogenated hydrocarbons	100 (J.A.B)

‡ This tube must be stored in a refrigerated place (0-10 °C/32-50 °F).

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea-suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
tert-Butanol (CH ₃) ₃ COH	111U◎	20~500	1	Yellow	Brown	Organic solvent treating, industrial hygiene	2	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	100(A)
Butyl acetate CH ₃ CO ₂ C ₄ H ₉	139SB◎	0.01~1.0%	2	Orange	Brownish green	Leakage & fire hazard detection in paints industry & painting; printing inks, artificial leather synthetic dyes, drugs & perfumes	3	10	Acetylene (3%), Propane (0.2%), Other organic gases or vapours except Halogenated hydrocarbons (50)	100 (J) 150 (A.B)
	138U	10~400	1	Pale yellow	Pale blue	industrial hygiene	1	10	Other organic gases or vapours	
Butyl acrylate CH ₂ =CHCO ₂ (CH ₂)CH ₃	211U	2~60	2	Yellow	Pale blue	Material of acrylic resin	2	10	Alcohols, Esters, Paraffin hydrocarbons, Aromatic hydrocarbons, Ketones, Halogenated hydrocarbons	2 (A) 1 (B)
Butyl amine C ₄ H ₉ NH ₂	105SD◎	1~20	1	Pale purple	Pale yellow	Organic synthesis intermediate; mfg. insecticide, emulsifying agent, medicine	3	10	Amines	5 (J)
Butyl cellosolve (Ethylene glycol monobutyl ether/2-Butoxyethanol) C ₄ H ₉ OCH ₂ CH ₂ OH	190U◎	10~1,000	3	Yellow	Pale blue	Organic solvent treating Industrial hygiene	2	10	Alcohols, Esters, Paraffin hydrocarbons, Aromatic hydrocarbons, Ketones, Halogenated hydrocarbons	20 (A) 25 (B)
Butyl ether (CH ₃ CH ₂ CH ₂ CH ₂) ₂ O	111U◎	10~1,200	1	Yellow	Brown		2	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	
tert-Butyl mercaptan (CH ₃) ₃ CSH	130U	1.1~11.0 0.55~5.5	1/2 1	Pale yellow	Pink	Industrial hygiene	2	10	Arsine, Hydrogen selenide, H ₂ S, HCN, PH ₃	0.5 (A)
	165SB	5~80 2.5~40	1/2 1	Yellow	Pink		2	10	H ₂ S, PH ₃ , Arsine, Hydrogen selenide, HCN, NO ₂ , NH ₃ , SO ₂ , Other Amines	
Butyl methacrylate CH ₂ =C(CH ₃)CO ₂ C ₄ H ₉	111U◎	20~1,000	1	Yellow	Brown	Organic synthesis intermediate; mfg. synthetic resin, lubricant additive, rust-proof for metal, paper coating agent	2	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	
tert-Butyl methyl ether (MTBE) CH ₃ OC(CH ₃) ₃	111U◎	25~500	1	Yellow	Brown	Fuel, powder, blast cell, etc; antiknock, solvent, abstergent	2	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	50(A)
Butyric acid CH ₃ CH ₂ CH ₂ COOH	216S◎	3~60	1	Pale pink	Yellow	Conflate artificial flavour; medicine; emulsifying agent	3	10	SO ₂ (1/20 × Acetic acid *), NO ₂ (10), HCl (2 × Acetic acid *), Cl ₂ (5)	
Carbon dioxide CO ₂	126SA	0.2~5.2% 0.1~2.6%	1/2 ①	Purplish blue	Pale pink	Air contamination test in buildings, closed vessels, tunnels, other confined spaces, CO ₂ concentration control in green houses, poultry farm, fruit storage	2	10	HCN (200), Cl ₂ (100), SO ₂ (500), H ₂ S (100)	
Carbon dioxide CO ₂ Concentration chart method	126B	0.03~0.7% 100~1,500	① 3	Purplish blue	Pale pink	Industrial hygiene	2	10	HCN (100), Cl ₂ (200), SO ₂ , H ₂ S (150), NO ₂	

* Interfered by coexistence more than parenthesized rate.

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea- suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
Carbon dioxide CO ₂	126SB	0.05~ 1.0%	1	Purplish blue	Pale pink	Industrial hygiene	2	10	HCN (100), Cl ₂ (200), SO ₂ , H ₂ S (150), NO ₂	5,000 (J.A.B)
	126SF	200~ 4,000 100~ 2,000	1/2 ①	Pink	Yellow		2	10	NO ₂ , H ₂ S, HCl, SO ₂ , HCN, Cl ₂	
	126SG	0.04~ 1.4% 0.02~ 0.7%	1/2 ①	Pink	Yellow		2	10	HCN	
Carbon dioxide -extra high range CO ₂	126SH	1~20%	1	Pink	Yellow	Combustion gas analysis	2	10	SO ₂ (3,000), H ₂ S (3,000), NO ₂ (50)	
Carbon dioxide -ultra high range CO ₂	126UH	5~50%	1/2	White	Purple	Industrial hygiene	2	10		
Carbon disulphide CS ₂	141SA ‡	30~500	1	Pink	Yellow	Recovery control in viscose rayon &cellophane plant, mfg. viscose rayon &cellophane	2	2 × 5	H ₂ S (400), SO ₂ , Cl ₂	1 (J) 1 (A) 10 (B)
	141SB ‡	2~50 0.8~20	② 4	Pink	Yellow	Industrial hygiene	3	2 × 5	H ₂ S (120), SO ₂ , Cl ₂	
	141SC ‡	0.1~3.0 0.2~6.4	④ 2	Pale purple	Pale yellow		1	2 × 5	Sulphur dioxide, Hydrogen sulphide, Chlorine	
Carbon monoxide CO Concentration chart method	100	25~ 1,000 5~300	1 3	Yellow	Dark brown	Gas manufacture blast furnace, garage, car park, tunnel; atmospheric pollution survey, combustion of coal gas	3	10	Ethylene (5,000), H ₂ (5,000), Acetylene, SO ₂ or NO ₂ (1/5 × CO *)	
Carbon monoxide-in presence of Ethylene, colour intensity CO	106B	Measure- ment for 30~300 seconds 10~ 1,000	1	Pale yellow	Green to Blue	Prediction of underground spontaneous combustion of coal	3	10	H ₂ S (1,000), NO ₂ (1), H ₂ (10%)	
Carbon monoxide-in presence of Ethylene and Nitrogen oxides, colour intensity CO	106C	Measure- ment for 30~300 seconds 10~ 1,000	1	Pale yellow	Green to Blue	Gas manufacture blast furnace, garage, car park, tunnel; atmospheric pollution survey, prediction of underground spontaneous combustion of coal, leakage detection of coal gas, combustible gas analysis; organic syntheses	2	10	H ₂ (10%), H ₂ S (1,000)	50 (J) 25 (A) 30 (B)
Carbon monoxide CO	106S	10~250	3	Yellow	Dark brown	Gas manufacture, blast furnace, garage, car park, tunnel; atmospheric pollution survey, combustion of coal gas	2	10	Ethylene (5,000), H ₂ (5,000), C ₂ H ₂ (1/5 × CO *), SO ₂ (1/5 × CO *), NO ₂ (1/5 × CO *)	
	106SA	40~ 2,000 20~ 1,000 5~50	1/2 ① 4	Yellow	Dark brown	Gas manufacture blast furnace, garage, car park, tunnel; atmospheric pollution survey, prediction of underground spontaneous combustion of coal, leakage detection of coal gas, combustible gas analysis; organic syntheses	3	10	Ethylene or H ₂ (5,000), Acetylene (1/5 × CO *), SO ₂ (1/5 × CO *), NO ₂ (1/5 × CO *)	
	106SC	1~50	1	Orange	Reddish purple		2	10	Formic acid, SO ₂ , C ₂ H ₂ , H ₂ , H ₂ S	
	106SH	0.1~ 2.0%	1	White	Brown		1	10	Propane (0.15%), iso-Butane (0.2%), Hexane (0.1%), Acetylene (0.3%), Ethylene (0.15%)	
	106SS	30~500	1	Yellow	Dark brown		1.5	10	Acetylene (1/20 × CO *), SO ₂ (1/2 × CO *), NH ₃ (100 × CO *), H ₂ S (1/2 × CO *)	

‡ This tube must be stored in a refrigerated place (0-10 °C/32-50 °F).

* Interfered by coexistence more than parenthesized rate.


Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea- suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
Carbon monoxide -ultra high range CO	106UH	0.2~ 20% 0.1~ 10%	1/2 ①	White	Dark brown	Insect control	3	10	Propane, iso-Butane, Acetylene, Ethylene, Hexane	50 (J) 25 (A) 30 (B)
Carbon tetrachloride (Tetrachloromethane) CCl ₄	147S ‡	5~60	1	White	Red	Paint manufacture, fire extinguishers waxes, polishes	1	2 × 5	Phosgene, Halogens, Cl ₂ , Trichloroethylene, Halogenated hydrocarbons	5 (J.A) 2 (B)
Carbonyl sulphide COS	239S	5~60	1	Pink	Yellow	Process control in chemicals mfg.	3	2 × 5	SO ₂ , CS ₂ , H ₂ S, n-Butane(0.1%)	5 (A)
Chlorine Cl ₂	109SA	1~40	1	White	Yellowish orange	Leakage detection in electrolytic soda plant; leakage detection & concentration control in synthetic rubber & plastics industry, refinery of titanium & aluminum; chlorinated hydrocarbons, synthetic chemistry, industrial hygiene	2	10	Br ₂ (1), Cl ₂ O (1), NO ₂ (1/2 × Cl ₂ *)	0.5 (J.A.B)
	109SB	0.5~ 10.0 0.125~ 2.5 0.1~2.0	① 4 5	White	Pale orange		2	10	Br ₂ (1), ClO ₂ (1), NO ₂ (1/5 × Cl ₂ *), NCl ₃ (5)	
	109U	0.1~2 0.05~1	① 2	White	Pale purple		2	10	HCl (20 × Cl ₂ *), NO ₂	
Chlorine dioxide ClO ₂ Concentration chart method	116	1~20	1	White	Reddish orange	Leakage defection in textile & paper bleaching plant; water treatment	2	10	Br ₂ , Cl ₂ or NO ₂ (1)	0.1 (A.B)
Chlorobenzene C ₆ H ₅ Cl	178SB	5~140 1~5	① 5	White	Pale brown	Industrial hygiene	2	2 × 5	Toluene, Xylene, CO (50), n-Hexane (100), Benzene, Ethyl benzene	10 (J.A) 1 (B)
Chloroform (Trichloromethane) CHCl ₃	152S ‡	70~500 35~250 23~167	② 3 4	White	Yellowish orange	Industrial hygiene (suspected carcinogen in humans)	2	2 × 5	Halogens, Halogenated hydrocarbons, n-Hexane (200)	3 (J) 10 (A) 2 (B)
Chloropicrin (Nitrotrichloromethane) Cl ₃ CNO ₂	172S ‡	0.1~ 16.0 0.05~ 8.0	① 2	White	Pink	Industrial hygiene	1	2 × 5	Carbon tetrachloride, Phosgene	0.1 (J.A)
Chloroprene (2-Chlorobutadiene) CH ₂ =CClCH=CH ₂	169S	1.0~20 0.5~10	1 ②	Greenish yellow	Pink		3	2 × 5	Cl ₂ , HCl (2,000), Vinyl chloride, Acetylene, Ethylene	10 (A)
Cresol C ₆ H ₄ (CH ₃)OH	183U	0.5~ 25.0	2	Pale yellow	Pale brown		2	10	NH ₃ (200), Aliphatic amines (50), Aromatic hydrocarbons (50), Phenols (2.5)	5 (J) 20mg/m ³ (A)
Crotonaldehyde CH ₃ CH=CHCHO	190U◎	2~40	3	Yellow	Pale blue	Compound materials	2	10	Alcohols, Esters, Paraffin hydrocarbons, Aromatic hydrocarbons, Ketones, Halogenated hydrocarbons	
Cumene (Isopropylbenzene) C ₆ H ₅ CH(CH ₃) ₂	111U◎	20~140	1	Yellow	Brown	Organic synthesis intermediate; Fuel	2	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	50 (A) 25 (B)
Cyclohexane C ₆ H ₁₂	115S	0.01~ 0.6%	1	Orange	Dark green	Fire hazard detection in paints industry & painting, extraction process of oils, fats, waxes	3	10	Paraffin hydrocarbons, Acetylene, Ethylene, Benzene (400), Toluene (800), Xylene (2,000)	150 (J) 100 (A.B)
Cyclohexanol C ₆ H ₁₁ OH	206U	5~500	2	Yellow	Pale blue	Process control in synthetic rubber industry	2	10	Other alcohols	25 (J) 50 (A.B)
Cyclohexanone CH₂—CH₂ CH₂—CH₂ C=O	197U	2~100	3	Yellow	Pale blue	Organic solvent treating, Industrial hygiene	3	10	Alcohols	20 (J.A) 10 (B)
Cyclohexene C ₆ H ₁₀	111U◎	20~300	1	Yellow	Brown	Medicament, synthetic intermediate	2	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	100(A)

‡ This tube must be stored in a refrigerated place (0-10 °C/32-50 °F).

* Interfered by coexistence more than parenthesized rate.

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea- suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
Cyclohexyl amine C ₆ H ₁₁ NH ₂	105SD	1~20	1	Pale purple	Pale yellow	Organic synthesis; plasticizer; rubber processing; corrosion inhibitor; dye; dry-clean detergent; mfg. emulsifying agent	3	10	Amines	10 (A,B)
Decahydronaphthalene C ₁₀ H ₁₈	111U©	20~200	1	Yellow	Brown	Solvent, adstergent, wax for floor	2	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	
n-Decane CH ₃ (CH ₂) ₈ CH ₃	111U©	5~90	1	Yellow	Brown	Organic synthesis intermediate; solvent, abstergent	2	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	
Diacetone alcohol (4-Hydroxy-4-methyl- 2-pentanone) (CH ₃) ₂ C(OH)CH ₂ COCH ₃	190U©	10~250	3	Yellow	Pale blue	Fire hazard detection in paints Industry, industrial hygiene	2	10	Alcohols, Halogenated hydrocarbons, Paraffin hydrocarbons, Aromatic hydrocarbons, Esters	50 (A,B)
Diborane B ₂ H ₆	242S	0.1~5.0 0.05~2.5 0.02~1.0	① 2 5	Pale yellow	Reddish purple	Industrial hygiene, semiconductor manufacturing process	2	10	Arsine, Phosphine, Silane, Disilane	0.01 (J) 0.1 (A)
Dibromomethane	157SB© ‡	2.5~40	1	White	Yellow		3	2 × 5		
Dibutyl amine (C ₄ H ₉) ₂ NH	105SD©	2~20	1	Pale puple	Pale yellow	Mfg. dye	3	10	Amines	
o-Dichlorobenzene C ₆ H ₄ Cl ₂	214S	5~100	1	White	Yellow	Solvent insecticide, industrial hygiene	2	10	Alcohols, Praffin hydrocarbons, Halogenated hydrocarbons, Esters, Aromatic hydrocarbons	25 (J.A,B)
p-Dichlorobenzene C ₆ H ₄ Cl ₂	215S ‡	10~150	1	White	Purplish brown		1	10	Benzene, Toluene, Hexane	10 (J.A) 25 (B)
1,1-Dichloroethane (Ethylidene chloride) CH ₃ CHCl ₂	235SA ‡	10~160	1	White	Purple	Industrial hygiene	1	3 × 5	Nitrogen oxides, Halogens, Halogenated hydrocarbons, Hexane (20), Alcohols (400), Toluene (20)	100(J.A,B)
1,2-Dichloroethane (Ethylidene dichloride) ClCH ₂ CH ₂ Cl	230SA ‡	5~50	1	White	Purple		1	3 × 5	Nitrogen oxides, Halogens, Halogenated hydrocarbons, Hexane (100)	10 (J.A) 5 (B)
2,2-Dichloroethyl ether (ClCH ₂ CH ₂) ₂ O	223S	2~30	1	Yellowish green	Pink		1	2 × 5	Halogenated hydrocarbons	15 (J) 5 (A)
1,2-Dichloroethylene (Acetylene dichloride) CHCl=CHCl	145SA ‡	42~840 20~400 9.2~184 4.2~84	1/2 ① 2 4	Yellow	Red	Extraction of natural dyes; mfg. perfumes; paints industry & painting; ferment retardation, industrial hygiene	1	10	Vinyl chloride, Hydrogen chloride, Trichloroethylene, Cl ₂	150 (J) 200 (A,B)
Dichloromethane (Methylene chloride) CH ₂ Cl ₂	180S ‡	30~ 1,000 10~200	② 4	White	Reddish orange	Industrial hygiene	2	2 × 5	Halogens, Halogenated hydrocarbons	50 (J.A) 100 (B)
1,2-Dichloropropane CH ₃ CHClCH ₂ Cl	157SB© ‡	20~250	1	White	yellow		3	2 × 5		10(A)
1,3-Dichloropropane ClCH ₂ CH ₂ CH ₂ Cl	194S ‡	10~500	1	White	Purple		1	2 × 5	Halogenated hydrocarbons	
1,3-Dichloropropene ClCH ₂ CH=CHCl	249S	0.5~10	1	Greenish yellow	Pink	Fumigation in soil by the name of D-D	3	2 × 5	Chloropicrin (1,800), MITC (600)	1(A)
Dicyclopentadiene C ₁₀ H ₁₂	190U©	2~60	3	Yellow	Pale blue	Mfg. EP rubber, unsaturated polyester resins, coating materials and perfume	2	10	Alcohols, Esters, Paraffin hydrocarbons, Aromatic hydrocarbons, Ketones, Halogenated hydrocarbons	5 (A)
Diethyl amine (C ₂ H ₅) ₂ NH	222S	1~20	1	Pale purple	Pale yellow	Industrial hygiene	3	10	NH ₃ , Other amines	10 (J) 5 (A,B)

‡ This tube must be stored in a refrigerated place (0-10 °C/32-50 °F).

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea- suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
Diethylbenzene C ₆ H ₄ (C ₂ H ₅) ₂	111U©	10~180	1	Yellow	Brown	Organic synthesis intermediate; solvent, abstergent	2	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	
Ethyl ether (Diethyl ether) C ₂ H ₅ OC ₂ H ₅	107SA	0.04~ 1.4%	1	Orange	Dark green	Fire hazard detection in solvent extraction process, hospital, laboratory, organic syntheses, clinical laboratories, explosive mfg.	3	10	Acetylene (3%), Propane (0.2%), Other organic gases or vapours except Halogenated hydrocarbons (50)	400 (J.A) 100 (B)
	107U	20~400	1	Pale yellow	Pale blue		2	10	Alcohols, Ketones, Esters, Aromatic hydrocarbons	
Diisobutyl ketone [(CH ₃) ₂ CHCH ₂] ₂ CO	139U©	20~ 1,000	1	Yellow	Pale blue		2	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons, Halogenated hydrocarbons, Paraffin hydrocarbons	25 (A)
Diisopropyl amine [(CH ₃) ₂ CH] ₂ NH	105SD©	1~16	1	Pale purple	Pale yellow	Dyestuffs, surfactant, herbicide	3	10	Amines	5 (A,B)
N,N-Dimethylacetamide CH ₃ CON(CH ₃) ₂	229S	5~70	2	Pale purple	Pale yellow	Solvents for chemical reaction, refinery and resins paint remover	1	10	CO ₂ , NH ₃ , Amines, Hydrazine	10 (J.A,B)
Dimethyl amine (CH ₃) ₂ NH	227S	1~20	1	Pale purple	Pale yellow	Industrial hygiene	3	10	NH ₃ , Other amines	10 (J) 5 (A) 2 (B)
N,N-Dimethylaniline C ₆ H ₅ N(CH ₃) ₂	105SD©	0.5~9	1	Pale purple	Pale yellow	Mfg. Vanillin; dye	3	10	Amines	5 (J.A,B)
Dimethyl ether (Methyl ether) CH ₃ OCH ₃	123S	0.01~ 1.2%	1	Orange	Dark brown	Impurity test of Methyl chloride, process control, refrigeration	3	10	Acetylene (3%), Propane (0.2%), Other organic gases or vapours except Halogenated hydrocarbons	400 (B)
N,N-Dimethylformamide HCON(CH ₃) ₂	196S	2~30 1~15	① 2	Pale purple	Pale yellow	Stationary phase of chromatography	2	10	SO ₂ (200), CO ₂ (0.1%), NH ₃ , Amines, Hydrazine	10 (J.A,B)
1,4-Dioxane 	139SB©	0.05~ 2.5%	2	Orange	Brownish green	Fire hazard detection in paints industry & painting industry, industrial hygiene	3	10	Acetylene (3%), Propane (0.2%), Other organic gases or vapours except Halogenated hydrocarbons (50)	10 (J) 20 (A) 25 (B)
	119U©	20~500	1	Yellow	Pale blue		2	10	Alcohols, Toluene (500)	
Dipropyl amine [CH ₃ (CH ₂) ₂] ₂ NH	105SD©	1~14	1	Pale purple	Pale yellow	Synthesis intermediate	3	10	Amines	
Divinyl benzene C ₆ H ₄ (CHCH ₂) ₂	158S©	5~50	1	White	Yellow	Ion exchange resin and membrance, synthetic rubber, etc.	3	10	Methanol (0.35%), Ethanol (0.18%), Ethyl acetate (700), Butyl acetate (700), Butadiene (5), Formaldehyde (15), Acetaldehyde (350), Acrylonitrile (400)	10 (A)
Epichlorohydrine (1-Chloro-2,3-epoxypropane) C ₃ H ₅ OCl	192S	5~50	3	Greenish yellow	Pink	Mfg, Epoxy resin, Chlorinated rubber, Glycerin	1	2 × 5	Halogenated hydrocarbons	0.5 (A,B)
Ethyl acetate CH ₃ CO ₂ C ₂ H ₅	111SA	0.1~ 5.0%	1	Orange	Brownish green	Fire hazard detection in paints industry & painting, mfg, artificial leather artificial silk, perfumes & flavours, photographic films & plates	3	10	Acetylene (3%), Propane (0.2%), Other organic gases or vapours except Halogenated hydrocarbons (50)	200 (J.B) 400 (A)
	111U	10~ 1,000	1	Yellow	Brown	Fire hazard detection in paints industry & painting	2	10	Other esters, Ketones, Alcohols, Aromatic hydrocarbons, Halogenated hydrocarbons	
Ethyl acrylate CH ₂ =CHCO ₂ C ₂ H ₅	211U©	5~60	2	Yellow	Pale blue	Material of Acrylic resin	2	10	Alcohols, Paraffin hydrocarbons, Esters, Halogenated hydrocarbons, Aromatic hydrocarbons	5 (A,B)

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea- suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
Ethyl alcohol (Ethanol) C ₂ H ₅ OH	104SA	0.05~ 5.0%	1	Yellowish orange	Pale green	Fire hazard detection in hospital, laboratory, pharmaceutical industry, mfg. perfumes & cosmetics	3	10	Paraffin hydrocarbons, Alcohols, Esters, Ketones, Aromatic hydrocarbons, Halogenated hydrocarbons	1,000 (A,B)
Ethyl amine C ₂ H ₅ NH ₂	227S	1~20	1	Pale purple	Pale yellow	Industrial hygiene	3	10	Ammonia, Other Amines	10 (J) 5 (A) 2 (B)
Ethyl benzene C ₆ H ₅ C ₂ H ₅	179S	10~500	1	White	Brown		1.5	10	Toluene (25), Xylene (50), Benzene (10), Methanol (1%), Hexane (0.1%)	50 (J) 20 (A) 100 (B)
Ethyl bromide C ₂ H ₅ Br	157SB⊙ ‡	2~80 20~400	① 1/2	White	Yellow		3	2 × 5		5 (A)
Ethyl-tert-Butyl Ether (ETBE) C ₂ H ₅ O(CH ₃) ₃	248U	1~60	3	Yellow	Pale Blue	Used for automobile fuel adding the ETBE in Gasoline	1	10	Ethanol	5 (A)
Ethyl cellosolve (Ethylene glycol monoethyl ether) (2-Ethoxyethanol) C ₂ H ₅ OCH ₂ CH ₂ OH	190U	5~500	3	Yellow	Pale blue	Organic solvent treating	2	10	Alcohols, Esters, Paraffin hydrocarbons, Aromatic hydrocarbons, Ketones, Halogenated hydrocarbons	5 (J) 10 (B)
Ethyl cellosolve acetate (Ethylene glycol ethyl ether acetate) CH ₃ CO ₂ CH ₂ OC ₂ H ₅	190U⊙	5~150	3	Yellow	Pale blue		2	10		5 (J.A) 10 (B)
Ethylene -colour intensity H ₂ C=CH ₂	108B	0.5~100 0.1~20	① 5	Pale yellow	Blue	Coal mining safety; concentration control in ripening fruits; organics, mfg: plastics	3	10	CO, NO ₂ (1), Cl ₂ , Butane, Pentane, Acetylene, H ₂ S (1,000), HCN, CS ₂ , NH ₃ , H ₂ (10%)	200 (A)
Ethylene H ₂ C=CH ₂	108SA	20~ 1,200	1	Yellow	Blue		2	10	CO, H ₂ S, Acetylene, Propylene	
	108SC	1~200	4	Yellow	Blue	Used for fruits ripening control	2	2 × 5	Acetylene, CO, Propylene, H ₂ S	
Ethylene dibromide (1, 2-Dibromoethane) BrCH ₂ CH ₂ Br	166S ‡	1~50	1	White	Yellow	Concentration control in granary fumigation process	1	2 × 5	Halogens or Halogenated hydrocarbons, Hexane (200)	0.5 (B)
Ethylene glycol (Monoethylene glycol) HOCH ₂ CH ₂ OH	232SA	20~250 mg/m ³	2	Pink	Yellow	Industrial hygiene	1.5	2 × 5	Ethylene oxide, SO ₂ , Aldehydes, H ₂ S	
	232SB	3~40 mg/m ³	3	Pale pink	Yellow		2	2 × 5	Aldehydes, SO ₂ , H ₂ S	
Ethylene oxide CH ₂ CH ₂ O	122SA 122SM 122SC 122SD ‡ 122SL	1.0~ 4.0% 0.01~ 1.8%	1/2 ①	Orange	Dark brown	Concentration control in fumigation of foodstuffs & textiles, fire hazard detection in ethylene glycol plant, sterilization	3	10	Alcohols, Ketones, Aromatic hydrocarbons, Esters, Halogenated hydrocarbons (0.5%)	1 (J.A) 5 (B)
		5~100	3	Pink	Yellow		3	10	Alcohols, Esters, Aromatic hydrocarbons	
		1~15	3	Pale pink	Yellow	Concentration control in fumigation & textiles	2	2 × 5	Aldehydes, SO ₂ , H ₂ S	
		0.7~ 14.0 0.1~2.0	1 ④	Yellow	Pale pink	Atmospheric pollution surveys in hospitals	1	2 × 5	Formaldehyde (0.5)	
		130~ 2,600 50~ 1,000	1/2 ①	Yellow	Pale blue	Concentration control in fumigation of foodstuffs & textiles, fire hazard detection in ethylene glycol plant, sterilization	3	10	Alcohols, Esters, Ethers, Ketones, Aromatic hydrocarbons, Aliphatic hydrocarbons(over C ₃), Halogenated hydrocarbons	

‡ This tube must be stored in a refrigerated place (0-10 °C/32-50 °F).

‡ This tube must be stored in a refrigerated place (0-10 °C/32-50 °F).

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea- suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
Ethyl mercaptan (Ethanethiol) C ₂ H ₅ SH	165SA	4~160 2~80 1~40	1 ② 4	White	Yellow	Atmospheric pollution survey, concentration control of odorant, plastics manufactures	2	10	Methyl sulphide (1), NO ₂ (1), Cl ₂ (0.2)	0.5 (A,B)
	165SB	5~80 2.5~40	1/2 1	Yellow	Pink	In LP gas	2	10	H ₂ S, PH ₃ , Arsine, Hydrogen selenide, HCN, NO ₂ , NH ₃ , SO ₂ , Other Amines	
	130U	1.05~10.5 0.525~5.25	1/2 1	Pale Yellow	Pink	Industrial hygiene	2	10	Arsine, Hydrogen selenide, H ₂ S, HCN, PH ₃	
Ethyl methacrylate CH ₂ =C(CH ₃)CO ₂ C ₂ H ₅	111U⊙	20~500	1	Yellow	Brown	Organic synthesis intermediate; mfg. synthetic resin, lubricant additive, rust-proof for metal, paper coating agent	2	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	
Formaldehyde HCHO	171SA ‡	20~ 1,500	1	Yellow	Pink	Atmospheric pollution survey, germicide, fungicide organic mfg. Industrial hygiene	2	2 × 5	Other aldehydes	0.1 (J) 2 (B)
	171SB	1~35	3	White	Brownish orange		3	2 × 5	Other aldehydes (1), Styrene, Ether (1,000), Ethyl acetate (1,000), Trichloroethylene (500)	
	171SC ‡	0.1~4.0 0.05~ 2.0	⑤ 10	Yellow	Pink		1	10	Acetaldehyde, NH ₃ (10), NO ₂ (3)	
Formic acid HCOOH	216S	1~50	1	Pale pink	Yellow	Mfg. organic medicine, industrial hygiene	3	10	SO ₂ (1/20 × HCOOH), NO ₂ (10), HCl (2 × HCOOH), Cl ₂ (5), Acetic acid	5 (J.A,B)
Furan (Furfuran) HC=CH > O HC=CH	122SA⊙	0.2~ 2.0% 0.01~ 0.9%	1/2 ①	Orange	Dark brown	Fire hazard detection in paints industry & painting	3	10	Aromatic hydrocarbons, Esters, Ketones, Alcohols, Halogenated hydrocarbons	
Furfural (2-Furaldehyde) HC=CH > O HC=C — CHO	190U⊙	2~60	3	Yellow	Pale blue	Materials of Nylon 66, insecticide	2	10	Alcohols, Esters, Paraffin hydrocarbons, Aromatic hydrocarbons, Ketones, Halogenated hydrocarbons	2.5 (J) 2 (A,B)
Furfuryl alcohol C ₄ H ₃ OCH ₂ OH	238S	5~25	5	White	Black	Material of furan resin, resin denaturant, solvent, industrial hygiene	1	10		5 (J.B) 10 (A)
Gasoline (Petrol) C _n H _m	110S	0.05~ 0.6%	1	Orange	Dark green	Process control, industrial hygiene	3	10	Paraffin hydrocarbons, Acetylene, Ethylene, Cyclohexane, Benzene (400) Toluene (800), Xylene (2,000)	100 (J) 300 (A)
General hydrocarbons iso-C ₄ H ₁₀ , n-C ₅ H ₁₂ , n-C ₈ H ₁₈ , n-C ₆ H ₁₄ Mineral turpentine	187S	50~ 1,400	1	Orange	Yellowish green		2	10	Aromatic hydrocarbons	
Heptane CH ₃ (CH ₂) ₅ CH ₃	113SB⊙	100~ 2,000	1	Orange	Yellowish green	Industrial hygiene	2	10	Paraffin hydrocarbons, Aromatic hydrocarbons, Alcohols (6%), Ketones (6%), Esters (6%)	200 (J) 400 (A) 500 (B)
n-Hexane CH ₃ (CH ₂) ₄ CH ₃	113SA	0.11~ 1.32% 0.05~ 0.6%	1/2 ①	Orange	Dark green	Solvent recovery control & fire hazard detection in extraction of oils & fats, paints industry & painting	3	10	Paraffin hydrocarbons, Acetylene, Ethylene, Cyclohexane, Benzene (400) Toluene (800), Xylene (2,000)	40 (J) 50 (A) 20 (B)
	113SB	50~ 1,400	1	Orange	Yellowish green		2	10	Paraffin hydrocarbons, Aromatic hydrocabons	
	113SC	20~800 5~200	1 ③	Yellow	Pale blue		2	10	Toluene	
Hydrazine (Amidrazone) NH ₂ · NH ₂	219S	0.2~10 0.1~5 0.05~ 2.5	2 ④ 8	Yellow	Blue	Rocket fuel, corrosion protection of boiler, antioxidant	2	10	NH ₃ , Amines	0.01 (A) 0.02 (B)

‡ This tube must be stored in a refrigerated place (0-10 °C/32-50 °F).

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea- suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
Hydrogen H ₂	137U	0.05~ 0.8%	1/2	Yellow	Green	Industrial hygiene	3	5	Ethanol (0.4%), CO (500)	
Hydrogen chloride HCl	173SA	40~ 1,200 20~600	1/2 ①	Purple	Pink	Industrial hygiene, process control, leakage detection, fire hazard detection; phamaceuticals organics mfg.	2	2 × 5	SO ₂ , Cl ₂	5 (J) 1 (B)
	173SB	4~40 2~20 0.4~4	1/2 ① 5	Yellowish green	Pink		3	2 × 5	Cl ₂	
Hydrogen cyanide HCN	112SA	0.01~ 3.0%	1	Yellow	Brownish red	Concentration control in fumigation process	3	10	Acetone, CS ₂ , SO ₂ (200), H ₂ S (100), Dicyanide	5 (J) 10 (B)
	112SB ‡	2~100 0.5~25	① 4	Yellow	Red	Electro-plating, metal hardening fumigation process, industrial hygiene	2	10	SO ₂ (1), H ₂ S (3), NH ₃ (5)	
	112SC ‡	0.3~8	3	Yellow	Red		1	2 × 5	SO ₂ (1), PH ₃ , H ₂ S, NH ₃ (2)	
Hydrogen fluoride HF	156S	0.5~30 0.25~15 0.17~2	③ 6 9	Greenish yellow	Pink	Dehydrator, mfg. of Hydrofluoric acid, and Freon, industrial hygiene	3	10	Cl ₂ , HCl	0.5 (J.A) 1.8 (B)
Hydrogen peroxide H ₂ O ₂	247S ‡	0.5~10.0	5	White	Yellow	Mfg. bleach, industrial chemicals and medicine	1	10	HCHO (10)	1 (A.B)
Hydrogen selenide H ₂ Se	167S	5~600 1~120	① 5	Pale yellow	Dark brown	Doping gas analysis in mfg. semiconductor, industrial hygiene	1	10	Arsine (10), H ₂ S, Iron carbonyl (10), SO ₂ , Hg ₂ , Acetylene (3%), CO (0.1%), Nickel carbonyl (10)	0.005 (J) 0.05 (A) 0.02 (B)
	242S©	1~20 0.5~10	① 2	Pale yellow	Reddish purple		2	10		
Hydrogen sulphide H ₂ S	120SB	6~300 3~150 1~50 0.75~37.5	1/2 ① 3 4	White	Dark brown	Mfg. viscose rayon, oil refinery, metal refinery, gas manufacture, chemical laboratory, process control	3	10	SO ₂ (12), Mercaptans (550), NO ₂ (2)	5 (B) 1 (A),J
	120SC	50~1,600	1	Pale yellow	Dark blue		3	10	CO (10), Ethylene, Propylene, Butylene, Acetylene or Methyl mercaptan (5), HCN, NH ₃	
	120SD	2~60 1~30	1/2 ①	White	Pale brown	Process control in sulphur recovery plant in petroleum refinery	3	10	SO ₂ (10), Mercaptans (300), NO ₂ (2)	
	120SE	2~40 1~20 0.5~10	1/2 ① 2	Yellow	Pink		2	10	PH ₃ , Mercaptans, NH ₃ , NO ₂	
	120SF	100~2,000 50~1,000 25~500	1/2 ① 2	White	Black	Impurity test of industrial raw gases, chemicals mfg; metallurgy.	3	10	SO ₂ (5,000), Mercaptans	
	120SH	0.1~4.0%	1	Pale blue	Black		3	10	SO ₂ (0.5%)	
120SM	0.1~1.2% 0.05~0.6%	1/2 ①	White	Dark brown	Process control in sulphur recovery plant in petroleum refinery	2	10	SO ₂ (0.3%)		
	120U	0.2~6.0 0.1~3.0	1/2 ①	Pale yellow	Pink	Industrial hygiene	2	10	Arsine, Hydrogen selenide, Mercaptans, PH ₃ , HCN, SO ₂	
Hydrogen sulphide -ultra high range H ₂ S	120UH	2~20%	1/2	Pale bule	Black	Oil field (esp. oil well)	3	10	SO ₂	
	120UT	5~40% 2.5~5%	1/2 1	Pale blue	Black		3	5	SO ₂ (8%)	

‡ This tube must be stored in a refrigerated place (0-10 °C/32-50 °F).

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea- suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
Hydrogen sulphide- Mercaptans -separation measurement H ₂ S & R-SH	282S	H2S; 1~30 R-SH; 0.5~5	1	White Pale yellow	Pale brown Pink		2	2 × 5	Tube for H ₂ S; SO ₂ (1/3 × H ₂ S *), NO ₂ (1/5 × H ₂ S *) Tube for R-SH; NO ₂ (2), NH ₃ , H ₂ S (30)	
Isobutane (CH ₃) ₃ CH	113SB©	50~ 1,200	1	Orange	Yellowish green	Industrial hygiene	2	10	Alcohols, Ketones or Esters (60%), Aromatic hydrocarbons, Paraffin hydrocarbons	
Isobutyl acetate CH ₃ CO ₂ CH ₂ CH(CH ₃) ₂	139SB©	0.01~ 1.4%	2	Orange	Brownish green	Fire hazard detection in paints industry & painting; mfg. artificial leather, textile sizing compounds, printing inks	3	10	Acetylene (3%), Propane (0.2%), Other organic gases or vapours except Halogenated hydrocarbons (50)	150 (A.B)
	153U	10~400	1	Pale yellow	Pale blue	Industrial hygiene	1	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	
Isobutyl acrylate CH ₂ CHCO ₂ CH ₂ CH(CH ₃) ₂	211U©	5~60	2	Yellow	Pale blue	Industrial hygiene	2	10	Alcohols, Paraffin hydrocarbons, Esters, Halogenated hydrocarbons, Aromatic hydrocarbons	
Isobutyl alcohol (Isobutanol) (CH ₃) ₂ CHCH ₂ OH	208U	5~100	3	Yellow	Pale blue	Detergent of paint and varnish, mfg. Esters for fruit essence, industrial hygiene	2	10	Alcohols, Toluene	50 (J.A.B)
Isobutylene (CH ₃) ₂ C=CH ₂	113SB©	0.03~ 2.0%	1	Orange	Yellowish green	Mfg. Butyl-rubber	2	10	Paraffin, Aromatic hydrocarbons, Alcohols (6%), Ketones (6%), Esters (6%)	
Isobutyric acid CH ₃ CH ₂ CH ₂ COOH	216S©	3~50	1	Pale pink	Yellow	Disinfectant; arificial flavour; substrate for perfume; tan processing	3	10	SO ₂ (1/20 × Acetic acid *), NO ₂ (10), HCL (2 × Acetic acid *), Cl ₂ (5)	
Isopentyl acetate (Isoamyl acetate) CH ₃ CO ₂ CH ₂ CH ₂ (CH ₃) ₂	188U	10~400	1	Pale yellow	Pale blue	Industrial hygiene	1	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	100 (J.B) 50 (A)
Isopentyl alcohol (Isoamyl alcohol) (CH ₃) ₂ CHCH ₂ CH ₂ OH	209U	5~100	3	Yellow	Pale blue	Stabilizer for Sodium thiosulphate hypo, industrial hygiene	2	10	Alcohols, Toluene	100 (J.A.B)
Isophorone C ₉ H ₁₄ O	197U©	5~80	3	Yellow	Pale blue	Solvent; ink, paint, lacquer, adhesive, copolymer, lag, finish and biocide	3	10	Alcohols	
Isoprene CH ₂ =C(CH ₃)CH=CH ₂	190U©	1~16	3	Yellow	Pale blue	Industrial hygiene	2	10	Alcohols, Esters, Aliphatic hydrocarbons (over C ₃), Aromatic hydrocarbons, Ketones, Halogenated hydrocarbons	
Isopropyl acetate CH ₃ CO ₂ CH(CH ₃) ₂	139SB©	0.01~ 1.2%	2	Orange	Brownish green	Fire fazard detection in paints industry & painting; mfg. artificial leather. plastic films, adhesives; recovery of acetic acid, industrial hygiene	3	10	Acetylene (3%), Propane (0.2%), Other organic gases or vapours except Halogenated hydrocarbons (50)	100 (J.A)
	111U	10~ 1,000	1	Yellow	Brown	File hazard detection in paints industry & painting	2	10	Other Esters, Ketones, Alcohols, Aromatic hydrocarbons, Paraffin hydrocarbons	
Isopropyl alcohol (2-Propanol) CH ₃ CH(OH)CH ₃	122SA©	0.05~ 2.5%	1	Orange	Dark brown	Fire hazard detection in paints industry & painting; mfg. pharmaceuticals, cosmetics, perfumes, inks, leather dyes, antifreezes, hydraulic brake fluids; metal decreasing & drying: hospitals, laboratories	3	10	Other Alcohols, Ketones, Esters, Aromatic hydrocarbons, Halogenated hydrocarbons (0.5%)	400 (J) 200 (A)
	150U	50~1,200 20~480	① 2	Yellow	Pale blue	Industrial hygiene	2	10	Other Alcohols, Esters, Paraffin hydrocarbons, Aromatic hydrocarbons, Ketones, Halogenated hydrocarbons	

* Interfered by coexistence more than parenthesized rate.

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea- suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
Isopropyl cellosolve (CH ₃) ₂ HCO(CH ₂) ₂ COH	190U©	5~350	3	Yellow	Pale blue		2	10	Alcohols, Esters, Paraffin hydrocarbons, Aromatic hydrocarbons, Ketones, Halogenated hydrocarbons	25 (A)
Isopropyl ether [(CH ₃) ₂ CH] ₂ O	111U©	30~800	1	Yellow	Brown	Gunpowder, blast, dyestuff, solvent, abstergent, mfg. rubber cement, lens	2	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	250(A)
Isopropyl mercaptan (CH ₃) ₂ CHSH	130U	1.15~11.5 0.575~5.75	1/2 1	Pale Yellow	Pink		2	10	Arsine, Hydrogen selenide, H ₂ S, HCN, PH ₃	
Isopropylamine (CH ₃) ₂ CHNH ₂	222S©	1~12	1	Pale purple	Pale yellow		3	10		5 (A)
Isovaleric acid (CH ₃) ₂ CHCH ₂ COOH	216S©	3~50	1	Pale pink	Yellow	Artificial fiavour, perfume and medical uses	3	10	SO ₂ (1/20 × Acetic acid *), NO ₂ (10), HCL (2 × Acetic acid *), Cl ₂ (5)	
Maleic anhydride C ₄ H ₂ O ₃	216S	0.2~10	4	Pale pink	Yellow	Material of polyester resin	3	10	SO ₂ (1/20 × Acetic acid *), NO ₂ (10), HCL (2 × Acetic acid *), Cl ₂ (5)	0.1 (J) 0.01 mg/m ³ (A)
Mercury vapour Hg	142S	0.5~10 mg/m ³ 0.1~2.0 mg/m ³	1 ⑤	Grey	Pale orange	Electrolytic soda industry; mfg. thermometer, fluorescent lamp	3	10	HCl (0.5), NO ₂ (0.1), Cl ₂ (0.1), H ₂ S (0.5)	0.025 mg/m ₃ (J.A)
Mesityl oxide (4-Methyl-3-penten-2-one) CH ₃ COCH=C(CH ₃) ₂	190U©	5~100	2	Yellow	Pale blue	Industrial hygiene	2	10	Alcohols, Esters, Paraffin hydrocarbons, Aromatic hydrocarbons, Ketones, Halogenated hydrocarbons	15 (A) 50 (B)
Methacrylic acid CH ₂ =C(CH ₃)COOH	216S©	1~50	1	Pale pink	Yellow	Mfg. soluble polymer	3	10	SO ₂ (1/20 × Acetic acid *) NO ₂ (10), HCL (2 × Acetic acid *), Cl ₂ (5)	20 (A.B)
1-Methoxy-2-propanol CH ₂ CHOHCHOCH ₃	197U©	10~500	1	Yellow	Pale blue	Solvent; ink, lacquer, cellulose, dye, etc	3	10	Alcohols	100 (A)
Methyl acetate CH ₃ CO ₂ CH ₃	111SA©	0.1~ 3.0%	1	Orange	Dark green	Fire hazard defection in paints industry & painting: mfg. perfumes dyes, synthetic finishes	3	10	Acetylene (3%), Propane (0.2%), Other organic gases or vapours, except Halogenated hydrocarbons	200 (J.A.B)
Methyl acrylate CH ₂ =CHCO ₂ CH ₃	211U	2~60	2	Yellow	Pale blue	Material of Acrylic resin, industrial hygiene	2	10	Alcohols, Esters, Paraffin hydrocarbons (over C ₃), Aromatic hydrocarbons, Halogenated hydrocarbons	2 (A)
Methyl alcohol (Methanol) CH ₃ OH	119SA	0.05~ 6.0%	1	Yellowish orange	Pale green	Fire hazard detection in hospital & laboratory; pharmaceutical industry; paints industry & painting; mfg. printing inks, denatured-alcohol, antifreezes, perfumes & cosmetics, industrial hygiene	3	10	Paraffin hydrocarbons (over C ₃), Alcohols, Esters, Aromatic hydrocarbons, Halogenated hydrocarbons	200 (J.A.B)
	119U	20~ 1,000	1	Yellow	Pale blue		2	10	Alcohols, Esters, Aromatic hydrocarbons, Paraffin hydrocarbons, Halogenated hydrocarbons	
Methanol in LPG	119LPG	100~ 1,000 ppmv	1/2	Yellow	Blue or Yellowish green	For use of antifreezing agent in LP gas	3	10		

* Interfered by coexistence more than parenthesized rate.

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea- suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
Methyl amine CH ₃ NH ₂	227S	1~20	1	Pale purple	Pale yellow	Industrial hygiene	3	10	NH ₃ , Other amines	10 (J) 5 (A)
N-Methyl aniline C ₆ H ₅ NHCH ₃	105SD©	0.5~6	2	Pale purple	Pale yellow	Acid acceptor; solvent	3	10	Amines	0.5 (A)
Methyl bromide (Bromomethane) CH ₃ Br	157SA ‡	10~500	1	White	Reddish orange	Insect fumigation for mills, warehouses, ships, vaults, freight cars; concentration control in granary fumigation	3	2 × 5	Ethylene dibromide, Trichloroethylene, Tetrachloroethylene or Chloroform (50), Cl ₂ , Br ₂ or NO ₂ (1), Dichloromethane (500)	1 (J.A) 5 (B)
	157SB ‡	2~80 1~25 0.4~10	① 2 4	White	Yellow		3	2 × 5	Halogens, Halogenated hydrocarbons, Hexane (200)	
	157SD	8.8~22 0.5~10 0.1~0.5	1/2 ① 3	White	Purple		1	2 × 5		
	157JS	3-70 g/m ³	1/2	Yellow	Brown		2	2 × 10		
Methyl butyl ketone CH ₃ (CH ₂) ₃ COCH ₃	237S©	5~80	2	Yellow	Pale blue		2	10		5 (A)
Methyl cellosolve (Ethylene glycol monomethyl ether) (2-Methoxyethanol) CH ₃ OCH ₂ CH ₂ OH	190U	5~500	3	Yellow	Pale blue	Organic solvent treating	2	10	Paraffin hydrocarbons (over C ₃), Alcohols, Ketones, Aromatic hydrocarbons, Halogenated hydrocarbons, Esters	5 (J.B) 0.1 (A)
Methyl cellosolve acetate CH ₃ CO ₂ CH ₂ CH ₂ OCH ₃	190U©	3~120	3	Yellow	Pale blue		2	10	Alcohols, Esters, Paraffin hydrocarbons, Aromatic hydrocarbons, Ketones, Halogenated hydrocarbons	5 (J.A)
Methyl chloroform (1,1,1-Trichloroethane) CH ₃ CCl ₃	160S ‡	30~400 15~200	① 2	White	Reddish orange	Metal decreasing & cleaning, extraction of oils & fats, paints industry, industrial hygiene	3	2 × 5	Halogens, Halogenated hydrocarbons	200 (J) 350 (A) 100 (B)
Methyl cyclohexane C ₆ H ₁₁ CH ₃	113SB©	100~ 1,600	1	Orange	Yellowish green	Cellulose solvent	2	10	Paraffin, Aromatic hydrocarbons, Alcohols (6%), Ketones (6%), Esters (6%)	400 (J.A)
Methyl cyclohexanol CH ₃ C ₆ H ₁₀ OH	199U	5~200	3	Yellow	Pale blue	Mfg. Imbricating oil & liquer, industrial hygiene	2	10	Alcohols	50 (J.A.B)
Methyl cyclohexanone CH ₃ C ₆ H ₉ O	198U	2~100	3	Yellow	Pale blue	Industrial hygiene	2	10	Alcohols	50 (J.A.B)
Methyl ethyl ketone (2-Butanone) CH ₃ COC ₂ H ₅	122SA©	1.0~ 5.0% 0.05~ 2.2%	1/2 ①	Orange	Dark brown	Process control, synthetic resins, solvent; solvent recovery control & fire hazard detection in paint industry & extraction of oils, fats, natural resins, waxes; cleaning & decreasing of metal surface, denaturization of alcohol	3	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons, Halogenated hydrocarbons (0.5%)	200 (J.A.B)
	139SB	0.01~ 1.4%	2	Orange	Brownish green		3	10	Other organic gases or vapours except Halogenated hydrocarbons (50), Acetylene (3%), Propane (0.2%)	
	139U	20~ 1,500	1	Yellow	Pale blue	Process control, fire hazard detection in paints industry, esp. industrial hygiene	2	10	Other Esters, Ketones, Alcohols, Aromatic hydrocarbons, Halogenated hydrocarbons, Paraffin hydrocarbons	
Methyl iodide (Iodomethane) CH ₃ I	176SC ‡	0.4~8 1~20 2.5~50	2 ① 1/2	White	Gray	Wood fumigation	1	10	1, 3-Dichloropropene, Hydrogen sulphide, Toluene	2 (A.B)
	176UH	500~ 15,000	1/2	Yellowish orange	Brownish green	Used for wood fumigation	3	10		

‡ This tube must be stored in a refrigerated place (0-10 °C/32-50 °F).

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea- suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
Methyl isobutyl ketone (Isopropyl acetone) CH ₃ COH ₂ CH(CH ₃) ₂	122SA◎	0.01~ 0.6%	3	Orange	Dark brown	Solvent forgums, resins, nitrocellulose	3	10	Alcohols, Other Ketones, Aromatic hydrocarbons, Esters, Halogenated hydrocarbons	50 (J.B) 20 (A)
	155U	5~300	1	Yellow	Pale blue	Industrial hygiene	2	10	Alcohols, Esters, Aliphatic hydrocarbons (over C ₃), Aromatic hydrocarbons, Ketones, Halogenated hydrocarbons	
Methyl isothiocyanate (MITC) CH ₃ NCS	245UH	200~ 10,000	1	Yellowish orange	Pale green	Used for wood fumigation	3	10		
	245UL ‡	0.3~10 0.66~22	① 1/2	Pink	Yellowish orange	Soil fumigation	1	10	Carbon dioxide	
	245UM	25~1,500 10~600	1/2 ①	Pale yellow	Pale blue	Used for wood fumigation	1	10		
Methyl mercaptan (Methanethiol) CH ₃ SH	164SA	5~140	1	White	Reddish yellow	Pesticides, fungicides, plastics, Atmospheric pollution survey, concentration control of odorant	2	10	Cl ₂ (0.2), Methyl sulphide (1), Ethyl mercaptan, Acetylene, CO, Acetylene, H ₂ S	0.5 (A.B)
	164SH	50~ 1,000	1	Pale yellow	Orange		3	10	H ₂ S (650), NO ₂ (1,000), Cl ₂ (1/3 × CH ₃ SH *)	
	130U	1~10 0.5~5	1/2 ①	Pale yellow	Pink		2	10	Arsine, Hydrogen selenide, H ₂ S, HCN, PH ₃	
Methyl methacrylate CH ₂ =C(CH ₃)CO ₂ CH ₃	184S	10~160	1	Yellow	Pale blue	Pigment, adhesive, paintings	2	10	Esters, Ketones, Alcohols, Aromatic hydrocarbons	50 (A.B)
Methyl propyl ketone CH ₃ CO(CH ₂) ₂ CH ₃	139U	20~ 1,500	1		Pale blue	Industrial hygiene	2	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons, Halogenated hydrocarbons, Paraffin hydrocarbons	
Methyl styrene CH ₃ C ₆ H ₄ CH=CH ₂	193S	10~500	1	White	Yellow	Synthetic resin	3	10	Styrene	50 (A)
Monoethanol amine (2-Aminoethanol) HOC ₂ H ₄ NH ₂	224SA	1~50 0.5~25	① 2	Pink	Pale purple	Pesticide, solvent, abstergent	2	10	Other Amines, NH ₃ , Hydrazine	3 (J.A) 1 (B)
Morpholine C ₄ H ₉ NO	105SD◎	2~22	1	Pale purple	Pale yellow	Solvent; rubber accelerator	3	10	Amines	20 (A) 10 (B)
Naphthalene C ₁₀ H ₈	153U◎	10~100	1	Pale yellow	Pale blue	Industrial hygiene	1	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	2 (A)
Nickel carbonyl (Nickel tetracarbonyl) Ni(CO) ₄ Concentration chart method	129	20~700	1	Pale yellow	Dark purple	Waste gas analysis	1/2	10	Arsine, Iron carbonyl, Mercury vapour, H ₂ S or SO ₂ (10), CO (1,000)	0.001 (J) 0.05 (A)
Nitric acid vapour HNO ₃	233S ‡	2~20 1~10	① 2	Pale yellow	Purple	Industrial hygiene	1	10	HF (8) or NO ₂ (50), HCl	2 (J.A)
Nitrogen dioxide NO ₂	117SA	20~ 1,000	1	White	Yellowish orange	Arc welding, acid dipping, garage (diesel exhaust): waste gas analysis in sulphuric & nitric acid dipping of metal products	3	10	Cl ₂ , Br ₂ , I ₂ or Ozone (5), NO (10)	0.2 (A)
	117SB	0.5~30.0	2	White	Yellowish orange		1	10	Cl ₂ , Br ₂ , or I ₂ (2), NO (15)	
	117SD	0.1~1.0	3	White	Pale purple		1.5	2 × 5	O ₃ (2), SO ₂ (7), Cl ₂ (3)	
Nitrogen oxide and dioxide -separately measurable NO & NO ₂ Concentration chart method	174A	NO; 10~300	1	White	Yellowish orange	Exhaust gas analysis	2	5	Cl ₂ (1)	25 (NO) (A) 3 (NO ₂) (A)
	174B	NO ₂ ; 1~40			Pale yellowish orange	Flue gas analysis (with hollow glass tubes)	2	2 × 5		
Nitrogen oxides NO + NO ₂	175SA ‡	20~250	1	White	Yellow	Exhaust gas analysis	1	10	SO ₂ (100), HCl (1,000)	
	175U	1~30 0.5~15	1/2 ①	White	Pale purple	Industrial hygiene	3	10	H ₂ S (5), HCl (500)	
	175SH	100~ 2,500	1	White	Yellow	Exhaust gas analysis	2	10	HCl (500)	

* Interfered by coexistence more than parenthesized rate.

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea- suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
n-Nonane CH ₃ (CH ₂) ₇ CH ₃	111U©	10~160 5~80	1/2 ①	Yellow	Brown		2	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	200(A)
Organic gas checker	186		1	Orange	Black or Dark green		3	10	H ₂ S (10)	
Oxygen O ₂	159SA	2~24%	1/2	White	Brown	Oxygen deficiency in underground or closed vessel, tunnels, mines	2	5	CO ₂ (5%), H ₂ S (2%), NO ₂ (2%), SO ₂ (2%)	
	159SB	2~24%	1/2	White	Brown	In the area where the danger of gas explosion exists	2	5		
Oxygen- Non-heating Type O ₂	159SC	3~24% 1.5~3%	1/2 1	Black	White	Oxygen deficiency in underground or closed vessels, tunnels and mines	2	2 × 5		
Oxygen + Carbon dioxide -separation measurement O ₂ & CO ₂	281S	O ₂ ; 2~10%	1	White	Brown	Combustion control	1.5	2 × 5		(CO ₂) 5000 (J.A.B)
		CO ₂ ; 1~20%		Pink	Yellow					
Ozone O ₃	182SA	100~ 1,000 50~500	1/2 ①	Dark blue	Yellow	Process control	2	10	Cl ₂ , NO ₂	0.1 (J) 0.05 (A)
	182SB	10~100 5~50 2.5~25	1/2 ① 2	Blue	Pale yellow		2	10	NO ₂ (10)	
	182U	0.15~ 3.0 0.05~ 1.0 0.025~ 0.5	1 ③ 6	Blue	White	Air pollution analysis, industrial hygiene	2	10	NO ₂ (0.5), Cl ₂ (10), Oxidant	
Pentane CH ₃ (CH ₂) ₃ CH ₃	113SB©	50~ 1,000	1	Orange	Yellowish green	Industrial hygiene	2	10	Paraffin hydrocarbons, Aromatic hydrocarbons (over C ₃), Alcohols (6%), Ketones (6%), Esters (6%)	300 (J) 600 (A.B)
Pentyl acetate (Amyl acetate) CH ₃ CO ₂ (CH ₂) ₄ CH ₃	210U	10~200	3	Pale yellow	Pale blue (over 20ppm) Dark brown (less than 20ppm)	Material of Acrylic resin, industrial hygiene	2	10	Alcohols, Esters, Ketones, Aliphatic hydrocarbons, Aromatic hydrocarbons	100 (J) 50 (A.B)
Pentyl amine CH ₃ (CH ₂) ₃ CH ₂ NH ₂	105SD©	2~22	1	Pale purple	Pale yellow	Dye; insecticide; synthetic detergent; corrosion inhibitor; medicine; petrol additive	3	10	Amines	
Phenol C ₆ H ₅ OH	183U	0.5~25.0	2	Pale yellow	Pale light brown Pale brown	Industrial hygiene	2	10	NH ₃ (200), Aliphatic amines (50), Phenols (2.5), Aromatic amines (50)	5 (J.A) 2 (B)
Phosgene (Carbonyl chloride) COCl ₂	146S ‡	0.5~20 0.1~4.0	① 5	White	Red	Leakage detection in mfg. dyes, chemicals, industrial hygiene	1	10	Cl ₂ (5), HCl (10), NO ₂ (100), SO ₂ (0.2%)	0.1 (J.A) 0.02 (B)
Phosphine in acetylene PH ₃	121SA †	20~800	1	Pale blue	Reddish purple	Impurity test of calcium carbide & acetylene	3	10	Arsine or H ₂ S (10)	0.3 (J.A) 0.1 (B)
	121SB †	5~90	1	Pale blue	Yellowish brown		3	10		

‡ This tube must be stored in a refrigerated place (0-10 °C/32-50 °F).
† Air flow control orifice is required.

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea- suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
Phosphine PH ₃	121SC	40~ 1,400 20~700	1/2 ①	White	Yellow	Concentration control in fumigation of tobacco leaves & cereals, doping gas analysis in mfg. semiconductor, industrial hygiene	3	10	Arsine (30), Hydrogen selenide (50), H ₂ S (40)	0.3 (J.A) 0.1 (B)
	121SD	1~20.0 0.5~10.0 0.25~ 5.0	1/2 ① 2	Pale orange	Brownish purple		1	10	NH ₃ (20), Mercaptans, Hydrogen sulphide (50)	
	121SG	5~150	1	White	Yellow		3	10	H ₂ S (5), H ₂ Se (5)	
	121SH	200~ 3,200 100~1,600	1/2 ①	White	Orange	Fumigation of grains	3	10	NO ₂ , H ₂ S, SO ₂	
	121SS	400~ 6,000 200~3,000	1/2 ①	White	Orange		3	10	Hydrogen cyanide (3%), Ammonia (0.6%)	
	121U	0.1~2.0 0.05~ 1.0	① 2	Pale yellow	Pink		2	10	Hydrogen selenide, Mercaptans, H ₂ S, HCN, SO ₂ , Arsine	
α -Pinene C ₁₀ H ₁₆	158S©	20~300	1	White	Yellow	Materials for perfume and materia medica	3	10	Methanol (0.35%), Ethanol (0.18%), Ethyl acetate (700), Butyl acetate (700), Butadiene (5), Formaldehyde (15), Acetaldehyde (350), Acrylonitrile (400)	
1-Propanol CH ₃ CH ₂ CH ₂ OH	190U©	20~300	3	Yellow	Pale blue		2	10	Alcohols, Esters, Paraffin hydrocarbons, Aromatic hydrocarbons, Ketones, Halogenated hydrocarbons	100 (A)
Propane C ₃ H ₈	125SA	0.02~ 0.50%	1	Orange	Brown	Mfg. city gas, fire hazard detection	2	10	Toluene, Hexane, Trichloro-ethylene	1,000 (A)
Propionic acid CH ₃ CH ₂ COOH	216S©	3~50	1	Pale pink	Yellow	Mfg. propionate and ester; Nickel-electro plating solution; ester perfume; artificial flavour; medicine; cellulose solvent	3	10	SO ₂ (1/20 × Acetic acid *), NO ₂ (10), HCL (2 × Acetic acid *), Cl ₂ (5)	10 (A.B)
Propyl acetate CH ₃ CO ₂ (CH ₂) ₂ CH ₃	139SB©	0.01~ 1.4%	2	Orange	Brownish green	Fire hazard detection in paints industry & painting, mfg. flavours & perfumes	3	10	Other organic gases or vapours except Halogenated hydrocarbons, Acetylene (3%), Propane (0.2%)	200 (J.A.B)
	151U	20~ 1,000	1	Pale yellow	Dark brown	Paints industry & painting, mfg. flavours & perfumes, industrial hygiene	2	10	Alcohols, Esters, Ketones, Paraffin hydrocarbons, Aromatic hydrocarbons	
Propyl amine CH ₃ CH ₂ CH ₂ NH ₂	105SD©	1~20	1	Pale purple	Pale yellow	Analgesic	3	10	Amines	
Propylene CH ₂ =CHCH ₃	185S	50~ 1,000	1	Yellow	Dark blue	Leakage detection	2	10	CO (200), Acetylene (50), Ethylene, H ₂ S (50)	500 (A)
Propylene glycol CH ₃ CHOHCH ₂ OH	122SC©	5~50	1	Pale pink	Yellow	Mfg. moisturizer, lubricant, emulsify, anti-freeze	2	2 × 5	Aldehydes, SO ₂ , H ₂ S	
Propylene oxide (1,2-Epoxypropane) 	122SC©	3~70	1	Pale pink	Yellow	Leakage detection in preparation of propylene oxide	2	2 × 5	Aldehydes, SO ₂ , H ₂ S	2 (J.A) 5 (B)
	163SA	1.0~ 5.0% 0.05~3.0%	1/2 ①	Orange	Dark brown		3	10	Aromatic hydrocarbons, Esters, Ketones, Alcohols, Halogenated hydrocarbons	
	163SD ‡	0.2~5.0	2	Yellow	Pale pink		1	2 × 5	Formaldehyde	

* Interfered by coexistence more than parenthesized rate.

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea- suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
n-Propyl mercaptan CH ₃ CH ₂ OH ₂ SH	130U	1.15~11.5 0.575~5.75	1/2 1	Pale yellow	Pink	Industrial hygiene	2	10	Arsine, Hydrogen selenide, H ₂ S, HCN, PH ₃	
Pyridine C ₅ H ₅ N	105SD©	0.5~10	1	Pale purple	Pale yellow	Alcohol denaturant; solvent; paint; medical care; dye of fiber	3	10	Amines	1 (A) 5 (B)
Silane SiH ₄	240S ‡	1~50 0.5~25	① 2	Yellow	Red	Industrial hygiene, semiconductor manufacturing process	1	10	PH ₃ (20), Arsine (50), Disilane (2), Diborane (20)	100 (J) 0.5 (B)
Styrene (Vinyl benzene) C ₆ H ₅ CH=CH ₂	158S	5~300 2.5~150	① 2	White	Yellow	Fire hazard detection in synthetic rubber, resin & plastic industry	3	10	Methanol (0.35%), Ethanol (0.18%), Ethyl acetate (700), Butyl acetate (700), Butadiene (5), Formaldehyde (15), Acetaldehyde (350), Acrylonitrile (400)	20 (J.A) 100 (B)
	158SB	2~100 1~50	② 4	White	Yellow		3	2 × 5		
Sulphur dioxide SO ₂	103SA	0.1~ 3.0%	1	Yellow	Blue	Process control in sulphuric acid paint (chemical mfg.)	3	10	H ₂ S (400)	2 (A)
	103SB	0.02~ 0.3%	1	White	Orange	Process control in sulphuric ore calcination	3	10	H ₂ S (100)	
	103SC	20~300	1	Purple	Yellow	Metal refining, mfg. sulphuric acid & nitric acid; waste gas analysis	2	10	Cl ₂ (1/5 × SO ₂ *), NO ₂ (100), H ₂ S (100 × SO ₂ *)	
	103SD	1~60	1	Pink	Yellow	Metal refining, mfg. sulphuric acid & nitric acid, industrial hygiene	3	10	NO ₂ (1 × SO ₂ *), Cl ₂ (2 × SO ₂ *)	
	103SE ‡	0.5~10 0.25~5	① 2	Pink	Yellow	Metal refining, mfg. sulphuric acid & nitric acid; waste gas analysis	1	10	NO ₂ , HCl	
Sulphur dioxide-in flue gas SO ₂	103SF	0.02~ 0.3%	1	White	Orange	Flue gas analysis in heat power plant (with moisture control tube)	3	2 × 5	H ₂ S (100)	
Sulphur dioxide-in carbondioxide SO ₂	103SG	0.5~25 0.1~3	① 4	Blue purple	White	Process control in beverage industry	3	10	NO ₂ (0.5), H ₂ S (0.5), NH ₃ (1)	
Sulphuric acid H ₂ SO ₄	244U	0.5~5 mg/m ³	5	Yellow	Pink	Petrochemical industry, industrial hygiene	2	10	HCl, HF, NO ₂ , Nitric acid, C ₁₂	0.2mg/m ³ (A)
Tetrachloroethylene (Perchloroethylene) Cl ₂ C=CCl ₂	135SA ‡	10~300 5~150	1/2 ①	White	Red	Dry cleaning, metal decreasing, paints industry & painting; solvent recovery control	2	10	Vinyl chloride, HCl, 1, 2-Dichloroethylene, Trichloroethylene, Cl ₂	25 (A) 50 (B)
	135SB ‡	1~10 0.2~2.0	① 4	Pale orange	Blueish purple		1	10	Trichloroethylene, 1, 2-Dichloroethylene or HCl (2), Vinyl chloride (40)	
	135SG	0.2~2.0% 0.1~ 0.2%	① 2	White	Dark brown		2	2 × 5	Trichloroethylene, 1, 1, 1-Trichloroethane, 1, 2-Dichloroethylene, Vinyl chloride, CO, Aromatic hydrocarbons	
	135SM ‡	125~ 1,250 50~500	1/2 ①	Yellow	Red	Process control in dry cleaning industry	1	10	1,2-Dichloroethylene (10), Trichloroethylene (10)	
Tetraethoxysilane Si(OC ₂ H ₅) ₄	243U	12.5~ 200 5~80	1 ②	Yellow	Pale blue	Industrial hygiene	3	10	Silane, Phosphine (5), Isopropyl alcohol (7), Trichloroethylene, Tetrachloroethylene, Ethanol (10)	10 (J)

‡ This tube must be stored in a refrigerated place (0-10 °C/32-50 °F).

* Interfered by coexistence more than parenthesized rate.

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea- suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
Tetrahydrofuran CH₂CH₂ CH₂CH₂ >O	102SA◎	2.0~ 5.0% 0.2~ 3.0%	1/2 ①	Orange	Dark brown	Fire hazard detection in paints industry & painting petrochemical industry, Industrial hygiene	3	10	Alcohols, Esters, Ketones, Aromatic hydrocarbon	50 (J.A.B)
	162U	20~400	1	Pale Yellow	Pale blue		2	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons, Halogenated hydrocarbons	
Tetrahydrothiophen C ₄ H ₈ S	190U◎	4~100	3	Yellow	Pale blue	Odorant	2	10	Alcohols, Esters, Paraffin hydrocarbons, Aromatic hydrocarbons, Ketones, Halogenated hydrocarbons	
Toluene (Methyl benzene) C ₆ H ₅ CH ₃	124SA	10~500	1	White	Brown	Solvent recovery control & fire hazard detection in paints industry & painting; rubber & plastics industry; mfg. dyes, printing inks, adhesives, industrial hygiene	3	10	Benzene (10), Xylene (50), Methanol (1%), Hexane (0.1%), Ethyl benzene (10)	20 (J.A) 50 (B)
	124SB	2~100	1	White	Brown	Solvent recovery control	3	10	Aromatic hydrocarbons, Hexane (high conc.)	
	124SH	100~ 3,000	1	White	Dark brown	Solvent recovery control	2	10	Benzene, Xylene, Ethyl benzene, Hexane, Methanol	
o-Toluidine C ₆ H ₄ (CH ₃)(NH ₂)	105SD◎	2~22	1	Pale purple	Pale yellow	Dye; printing	3	10	Amines	1 (J) 2 (A)
p-Toluidine C ₆ H ₄ (CH ₃)(NH ₂)	105SD◎	2~20	1	Pale purple	Pale yellow	Analytical reagent; dye	3	10	Amines	2 (A)
1, 1, 2-Trichloroethane Cl ₂ CHCH ₂ Cl	236SA ‡	10~100	1	White	Purple	Industrial hygiene	1	3 × 5	Nitrogen oxides, Halogens, Halogenated hydrocarbons, Hexane (100)	10 (J.A)
Trichloroethylene Cl ₂ C=CHCl	134SA ‡	10~300 5~150	1/2 ①	White	Red	Metal decreasing & cleaning; dry cleaning & insect fumigation of clothes; mfg. printing inks, industrial hygiene	2	10	Vinyl chloride, HCl, 1, 2-Dichloroethylene, Tetrachoroethylene, Cl ₂	10 (J.A) 100 (B)
	134SB ‡	2.3~36.8 1~16 0.2~3.2	1/2 ① 4	Pale orange	Blueish purple		1	10	Tetrachloroethylene, 1, 2-Dichloroethylene or HCl (2), Vinyl chloride (20)	
	134SG	0.05~ 2.0%	1	White	Yellow		2	10	Tetrachloroethylene, 1, 1, 1-Trichloroethane, 1, 2-Dichloroethylene, Vinyl chloride, CO, Aromatic hydrocarbons	
Triethyl amine (C ₂ H ₅) ₃ N	213S	2~20 1~10	1/2 ①	Pale purple	Pale yellow	Mfg. emulsifier, organic solvent, waterproofing agent, dyestuff, surface activator and agricultural chemicals etc. industrial hygiene	3	10	NH ₃ , Other Amines	1 (A) 2 (B)
Trimethyl amine (CH ₃) ₃ N	222S	1~20	1	Pale purple	Pale yellow	Industrial hygiene	3	10	NH ₃ , Other Amines	5 (A) 2 (B)
	105SE	5~100 2.5~50 0.5~10	1/2 ① 5	Pale purple	Pale yellow		3	10	Sulphur dioxide, Chlorine, Amines	
1, 2, 4-Trimethyl benzene C ₆ H ₃ (CH ₃) ₃	111U◎	20~250	1	Yellow	Brown		2	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	25 (J.A.B)
2, 2, 4-Trimethyl pentane (CH ₃) ₃ CCH ₂ C(CH ₃) ₂	113SB◎	200~ 4,000 100~ 1,400	1/2 ①	Orange	Yellowish green	Automotive fuel	2	10	Paraffin, Aromatic hydrocarbons, Alcohols (6%), Ketones (6%), Esters (6%)	

‡ This tube must be stored in a refrigerated place (0-10 °C/32-50 °F).

Gas to be measured (Synonym) Chemical Formula	Tube No.	Mea- suring Range (ppm)	No. of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes/ box	Interferences (ppm)	T.L.V (ppm) J: JPN A: U.S.A B: U.K.
				Original	Stain					
n-Undecane CH ₃ (CH ₂) ₉ CH ₃	111U◎	10~140	1	Yellow	Brown		2	10	Alcohols, Esters, Ketones, Aromatic hydrocarbons	
n-Valeric acid CH ₃ (CH ₂) ₃ CO ₂ H	216S◎	3~70	1	Pale pink	Yellow	Artificial flavour; perfume; lubricant; plasticizer, medicine	3	10	SO ₂ (1/20 × Acetic acid *), NO ₂ (10), HCL (2 × Acetic acid *), Cl ₂ (5)	
Vinyl acetate CH ₃ CO ₂ CH=CH ₂	237S	10~120 5~60	① 2	Yellow	Pale blue	Process control in Acetylene plant	2	10	Ethylene (150), Alcohols, Ethers, Esters	10 (A)
Vinyl chloride (Chloroethylene) CH ₂ =CHCl	132SA	0.05~ 1.0%	1	Brownish orange	Brownish green	Leakage & fire hazard detection in PVC plant, industrial hygiene	3	10	Acetylene (3%), Propane (0.2%), Other organic gases or vapors except Halogenated hydrocarbons (50)	2.5 (J) 1 (A) 3 (B)
	132SB ‡	5~500	1	White	Reddish orange	Process control, leakage detection and fire hazard detection in synthetic rubber & plastics industry	1.5	2 × 5	Cl ₂ , HCl, Other Halogens, Halogenated hydrocarbons	
	132SC	0.4~ 12.0 0.2~6.0 0.1~3.0	1 ② 4	Greenish yellow	Pink	Industrial hygiene	3	2 × 5	HCl (500), Acetylene (1%), Ethylene (300), Cl ₂ (50)	
Water vapour H ₂ O	177SA	1.7~33.8 mg/L	1	Yellowish green	Purple	Industrial hygiene, process control	3	10	Methanol (0.3%), Ethanol (0.3%), Ethyl acetate (0.3%), Acetone (0.5%), NH ₃ (0.02%), NO ₂ (0.2%)	
	177U	0.05~2.0 mg/L	1	Greenish yellow	Yellowish green (less than 0.6mg/l)	Industrial hygiene, process control	3	10	Alcohols	
	177UL	3~80 LB/MMCF	1	Yellow	Blue (over 40LB/ MMCF) Yellowish green (below 40LB/ MMCF)	Petrochemical industry, industrial hygiene	3	10		
Water vapour -ultra low range H ₂ O	177UR	2~12 LB/MMCF	2	Yellow	Yellowish green	Petrochemical industry, industrial hygiene	3	10		
Xylene (Dimethyl benzene) C ₆ H ₄ (CH ₃) ₂	143SA	5~1,000	2	White	Brown	Leakage & fire hazard detection in phthalic acid plant; paints industry & painting mfg. dyes, adhesives, printing inks, cleaning fluids, industrial hygiene	1.5	10	Benzene, Toluene, Ethyl benzene, Methanol (1%), Hexane (0.1%)	50 (J.B) 100 (A)
	143SB	5~200	2	White	Brown		2	10	Toluene (1/5 × Xylene)	

‡ This tube must be stored in a refrigerated place (0-10 °C/32-50 °F).

* Interfered by coexistence more than parenthesized rate.

Notes: (1) Only compounds commonly occurring and affecting accurate readings are listed. Interferences are normally in proportion to the ratio of interfering compound to the substance to be measured. The figure listed after the interferences are "ppm" unless otherwise indicated.
(2) 2 × 5 in the Q'ty of tube/box column means 5 detector tubes and 5 pretreat tubes.
(3) 3 × 5 in the Q'ty of tube/box column means 5 detector tubes and 10 (in total) pretreat tubes.
(4) TLV.(J): Occupational Exposure Limits (OELs) recommended in Journal of Occupational Health issued by the Japan Society for Occupational Health.
TLV.(A): Threshold Limit Values for Chemical Substances in the Work Environment Adopted by ACGIH (American Conference of Governmental Industrial Hygienists) with Intended Changes for 2014.
TLV. (B): Occupational Exposure Limit listed on guidance Note EH40/2007 from the Health and Safety Executive in U.K.

SUBSTANCES TO BE MEASURED BY USING CONVERSION CHARTS

Conversion charts are available, upon request, for the following listed chemical substances using existing detector tubes within the Kitagawa range.

These conversion charts are for use in a temperature of 20°C (68°F). Other conditions, such as different temperatures, humidity and coexisting gases, are not confirmed. Please specify the name of the substance to be measured together with the tube number when ordering.

SUBSTANCE	CHEMICAL FORMULA	MEASURING RANGE	USING TUBE
Allyl chloride	CH ₂ CHCH ₂ Cl	1-40 ppm	132SC
Benzyl chloride	C ₆ H ₅ CH ₂ Cl	1-16 ppm	132SC
1-Bromopropane	CH ₃ CH ₂ CH ₂ Br	10-500 ppm	157SA
2-Bromopropane	(CH ₃) ₂ CHBr	10-500 ppm	157SA
m-Chlorotoluene	C ₆ H ₄ Cl(CH ₃)	0.5-10 ppm	132SC
o-Chlorotoluene	ClC ₆ H ₄ CH ₃	1-50 ppm	132SC
p-Chlorotoluene	ClC ₆ H ₄ CH ₃	1-50 ppm	132SC
p-Cymene	CH ₃ C ₆ H ₄ CH(CH ₃) ₂	20-200 ppm	102SD
1,1-Dichloroethylene	CH ₂ = CCl ₂	1-22 ppm	132SC
Disilane	Si ₂ H ₆	1-50 ppm	240S
Ethylene chlorohydrine	ClCH ₂ CH ₂ OH	5-300 ppm	119U
Iodine	I ₂	0.7-42 ppm	117SB
Mineral turpentine	—	4-200 ppm	111U
Trichlorotoluene	C ₆ H ₅ CCl ₃	0.2-4 ppm	132SC
※ Benzaldehyde	C ₆ H ₅ CHO	5-70 ppm	190U
※ 1,1,2,2-Tetrachloroethane	CHCl ₂ CHCl ₂	20-80 ppm	236SA

☆ N.B. For the above two substances, the conversion chart and the measuring range may vary with each manufacturing lot.

SPECIAL APPLICATION TUBES

COMPRESSED BREATHING AIR TEST SYSTEM

The system is designed to measure impurities in compressed breathing air such as in scuba and rescue cylinders, as well as from an outlet of an air-charge compressor.

● Compressed Breathing Air Test Tubes

Substances to be measured	Tube No.	Measuring Range (ppm)	Sampling Time (minutes)	Colour Change		Shelf Life (year)	Q'ty of tubes / box
				Original	Stain		
Carbon monoxide (CO)	600SP	5~100 2.5 ~ 5	② 4	Yellow	Dark brown	2	10
Carbon dioxide (CO ₂)	601SP	100~3,000	2	Purplish blue	Pale pink	2	10
Oil mist	602SP	0.3~5mg/m ³	25	Yellow	Pale blue	2	10
Water vapour (H ₂ O)	603SPA	20~160mg/m ³	1	Yellow	Yellowish green or blue	3	10
Oxygen (O ₂)	※ 604SP	2~24%	1	White	Brown	2	10

※ A 50mL plastic syringe and a 1m vinyl tube are optional accessories for 604SP.

● Model P-41R Compressed Breathing Air Sampling Kit




Composition

- ① Control assembly 1 set
(Including an adapter with W22-14RH Female thread for rescue and on-land cylinders) 1 pc
- ② International fitting yoke (For a scuba cylinder) 1 pc
- ③ Gas detector tube (an extra option) 1 pc
- ④ Tube protector 1 pc
- ⑤ Tip cutter for Gas detector tube 1 pc
- ⑥ Wrench 1 pc
- ⑦ Digital stopwatch 1 pc
- ⑧ Carrying case (Aluminum) 1 pc
- Instruction manual 1 set

Optional Accessories for 604SP only


- ⑨ 50mL plastic syringe
- ⑩ 1m vinyl tube

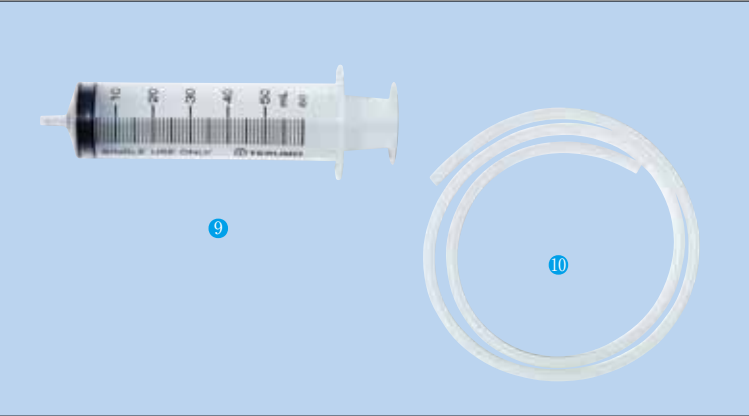

INORGANIC GAS/ORGANIC GAS QUALITATIVE DETECTOR TUBES

Our new qualitative-analysis-detector-tube system is composed of only two (2) kinds of gas detector tubes which contain different reagents at multiple sections in the tubes.
Only these tubes are able to detect various kinds of gases.
Although the main purpose of this system is qualitative analysis, simple quantitative analysis of the gases is also possible.

● Inorganic Gas Qualitative Detector Tube (Tube No 131)

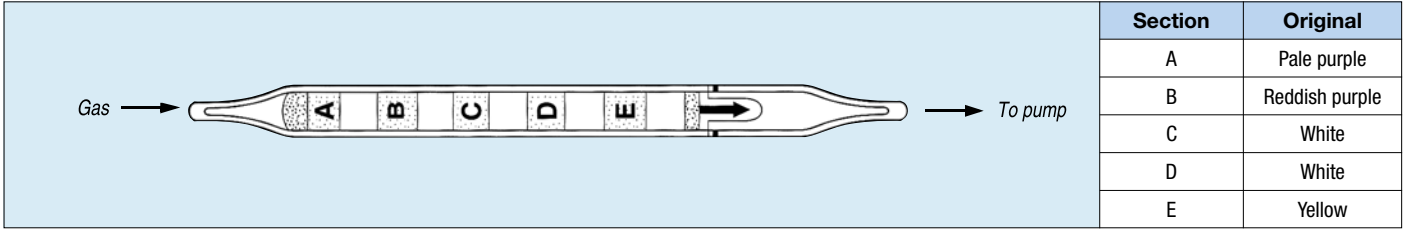

Specifications

- ① Tube/box : 10 tubes (10-time use)
- ② Pump stroke : 1 (100mL)
- ③ Sampling time : 20 seconds
- ④ Shelf life : 1 year


Substances to be detected and the detectable gas concentration limit (Unit: ppm) (※ Organic gas)

NH ₃ (5)	SO ₂ (10)	HCl (20)	Acetic acid (15) ※	CO (10)	Acetylene (10) ※
Amines (50)	Cl ₂ (5)	NO ₂ (5)	H ₂ S (10)	PH ₃ (2)	Methyl mercaptan (10) ※

Non-discoloration confirmed substances

HCN Ethylene CO₂ NO

● Organic Gas Qualitative Detector Tube (Tube No 186B)

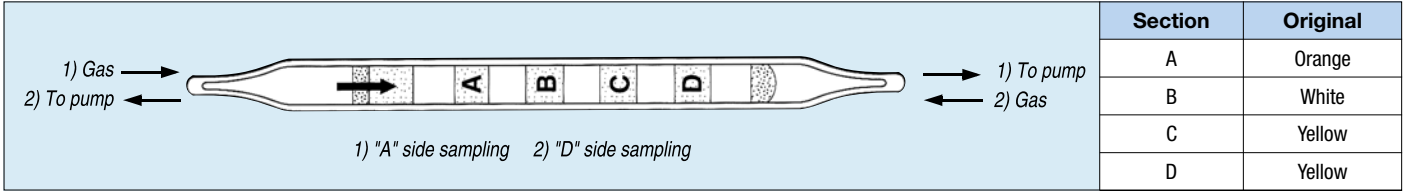

The "A" side sampling at the arrow mark direction and the "D" side sampling at an inverse direction of the arrow mark are required by using two fresh tubes for one-time analysis.

Specifications

- ① Tube/box : 10 tubes (5-time use)
- ② Pump stroke : 1 (100mL) +1 (100mL)
- ③ Sampling time : 30+30 seconds
- ④ Shelf life : 2 years

Substances to be detected and the detectable gas concentration limit (Unit: ppm) (※ Inorganic gas)

Hexane (10)	Acetylene (100)	Ethylene oxide (100)	CS ₂ (100)
Propane (100)	Gasoline (0.1 mg/L)	Methyl mercaptan (20)	Phenol (10)
Butane (10)	Kerosine (0.1 mg/L)	Toluene (200)	Cresol (20)
Pentane (10)	Benzene (100)	Ethyl benzene (400)	Aniline (50)
Heptane (10)	Acetone (500)	Xylene (1,000)	Ethyl amine (100)
1,1,1-Trichloroethane (1,000)	Methyl ethyl ketone (100)	Styrene (100)	Arsine (20) ※
Trichloroethylene (100)	Methyl isobutyl ketone (100)	Methyl alcohol (100)	H ₂ S (10) ※
Tetrachloroethylene (100)	Formaldehyde (10)	1-Butanol (100)	CO (100) ※
Vinyl chloride (10)	Acetaldehyde (100)	Isopropyl alcohol (500)	
Ethylene (10)	Ethyl acetate (500)	Ethyl cellosolve (100)	
Butadiene (1,000)	Butyl acetate (100)	Tetrahydrofuran (100)	

Non-discoloration confirmed substances

CH₃Br Acetic acid Methane CCl₄ Pyridine

DETECTOR TUBES USED FOR DISSOLVED SUBSTANCES IN SOLUTION

Tube No.	Substance	Chemical Formula	Measuring Range (ppm)	Sampling		Sampling Method	Colour Change		Typical Applications	Shelf Life (year)	Use of detector kit
				Volume (mL)	Time (sec)		Original	Stain			
200SA	Sulphide ion	S ²⁻	2~1,000	over 5.0	180	Immersion method	White	Dark brown	Waste water analysis in pulp & paper mills, petroleum refineries, other chemical industries, waste disposal plants, water treatment plant	1	None needed
200SB			0.5~10	over 5.0	150	Immersion method	White	Pale brown		2	
201SA	Chloride ion	Cl ⁻	10~2,000	over 5.0	90	Immersion method	Brown	Pale yellow	Detection of salt water in marine lubricating oils, impurity test, testing portable water supply	3	None needed
201SB			3~200	over 5.0	90	Immersion method	Brown	White		2	
201SC			1~60	over 5.0	180	Immersion method	Brown	Pale yellow		2	
203S	Copper ion	Cu ²⁺	1~100mg/L	over 5.0	60	Direct sampling method	White	Orange	Waste water analysis in pulp & paper mills, petroleum refineries, other chemical industries, waste disposal plants, water treatment, school hygiene	1	Rubber ball (As extra)
204S	Cyanide ion	CN ⁻	0.2~5	over 5.0	120 to 240	Direct sampling method	White	Blue	KCN & NaCN in water	2	Rubber ball (As extra)
205SL	Salinity	NaCl	0.01~0.8%	over 5.0	30	Suction method	Brown	White	Detection of salt water in marine lubricating oils, impurity test, testing portable water supply	2	Filter paper/ Rubber ball (As extra)
234SA	Free residual chlorine	Cl ₂	0.4~5	over 5.0	180	Immersion method	White	Purple	Detection of dissolved chlorine for disinfection & sterilization of swimming pools, etc.	2	None needed
77S	Water content in solvent	H ₂ O	10~160mg/L 50~400mg/L	Position C D	10 10	Direct sampling method	Yellow	Blueish purple	Detection of water content in solvent	2	Rubber bulb

Quantity of tubes per box:10 tubes each.

INDOOR AIR POLLUTANTS MEASUREMENT DETECTOR TUBE

Tube No.	Gas to be measured	Chemical Formula	Measuring Range (ppm)	Sampling		Colour Change		Typical Applications	Shelf Life (year)
				Flow Rate (mL/min)	Time (minutes)	Original	Stain		
710 ‡	Formaldehyde	HCHO	0.01~0.12 0.04~0.48	300 300	30 10	Yellowish orange	Pink	Indoor air pollutants	1
710A ‡			0.05~1.0 0.10~2.0	30	30 15	Yellowish orange	Pink		1
713 ‡			0.01~0.50	350	10	Yellowish orange	Pink		1
721 ‡	Toluene	C ₆ H ₃ CH ₃	0.05~1.0	200	20	White	Brown		1
721© ‡	Ethyl benzene	C ₆ H ₄ (C ₂ H ₅) ₂	0.05~1.2						1
721© ‡	Xylene	C ₆ H ₄ (CH ₃) ₂	0.1~1.4						1
730	p-Dichlorobenzene	p-C ₆ H ₄ Cl ₂	0.01~0.40	200	15	Yellow	Reddish purple		1

‡ This tube must be stored in a refrigerated place (0-10 °C/32-50 °F).
Quantity of tubes per box:20 tubes(Tube No.721, 730: 2 × 10 tubes).
Model S-23E or S-27 Air Sampler is required for above tubes (See page 35).

ATMOSPHERIC ENVIRONMENT MEASUREMENT DETECTOR TUBE

Tube No.	Gas to be measured	Chemical Formula	Measuring Range (ppm)	Sampling		Colour Change		Typical Applications	Shelf Life (year)
				Flow Rate (mL/min)	Time (minutes)	Original	Stain		
740	Nitrogen dioxide	NO ₂	0.01~0.1 0.02~0.2	200 200	20 10	White	Reddish purple	1Atmospheric environment measurement	2
750	Trichloroethylene	Cl ₂ C = CHCl	30~400µg/m ³ 69~920µg/m ³	100	30 15	Yellowish orange	Purple red		1
760	Tetrachloroethylene	Cl ₂ C = CCl ₂	30~400µg/m ³ 69~920µg/m ³	100	30 15	Yellowish orange	Purple red		1
770	Hydrogen fluoride	HF	0.05~1.0	250	10	Pale yellow	Pink	Industrial hygiene	2

Quantity of tubes per box:10 tubes each.(Tube No.750, 760: 2 × 10 tubes)
Model S-23E or S-27 Air Sampler is required for above tubes (See page 35).

TIME WEIGHTED AVERAGE TUBES

Tube No.	Gas to be measured	Chemical Formula	Measuring Range (ppm)	Sampling		Colour Change		Typical Applications	Shelf Life (year)	T.L.V T.W.A (ppm) J: JPN A: U.S.A B: U.K.
				Flow Rate (mL/min)	Time (hours)	Original	Stain			
500	Carbon monoxide	CO	5~400	6	0.5~8	White	Brown ringed	Industrial hygiene	3	50 (J.B) 25 (A)
501	Ammonia	NH ₃	5~200	8	1~8	Purple	Yellow		3	25 (J.A.B)
502	Hydrogen Sulphide	H ₂ S	1~20	6	1~8	White	Brown		1	5 (J.A.B)
503	Sulphur dioxide	SO ₂	0.5~20	6	1~8	Purple	Yellow		3	2 (A.B)
504	Toluene	C ₆ H ₅ CH ₃	20~200	10	1~8	White	Brown		3	50 (J.A.B)

Quantity of tubes per box:10 tubes each.
TLV-TWA(The Threshold Limit Value-Time Weighted Average): The time-weighted average concentration for an 8-hour workday and a 40-hour workweek, to which nearly all workers may be repeatedly exposed, day after day, without adverse effect.

SUPER-HIGH SENSITIVITY DETECTOR TUBES
FOR AMMONIA IN ART GALLERIES/MUSEUMS AND CLEAN ROOMS

Tube No.	Gas to be measured	Chemical Formula	Measuring Range	Sampling		Colour Change		Typical Applications	Shelf Life (year)
				Flow Rate (mL/min)	Time (hours)	Original	Stain		
900NH	Ammonia	NH ₃	10~80µg/m ³	400	60	Pale purple	Pale yellow	For Cultural-property protection in art galleries and museums	2
901NHL	Ammonia	NH ₃	1~12µg/m ³	400	60	Pale purple	Pale yellow	For clean room monitoring of semiconductor industries	2
910	Organic acid	Acetic acid CH ₂ = CHCOOH Formic acid HCOOH	10~400µg/m ³ 25~1000µg/m ³ 20~800µg/m ³	200 200 200	60 30 60	Pale pink	Pale yellow	For Cultural-property protection in art galleries and museums	3

Quantity of tubes per box:10 tubes each.
Model S-23E or S-27 Air Sampler is required for above tubes (See page 35).

CRIMINAL INVESTIGATION DETECTOR TUBE

Tube No.	Detector Tube	Chemical Formula	Measuring Range (ppm)	No.of Pump Strokes	Colour Change		Typical Applications	Shelf Life (year)	Q'ty of tubes / box
					Original	Stain			
290P	Detector tube for crime investigation			1	White	[Gasoline]Brown/dark brown/orange [Kerosene]Pink/dark brown	Discriminate Gasoline and/or Kerosene	1	10
290P II	Detector tube for crime investigation			1	White	[Gasoline]Yellow/brown/greenish brown [Kerosene]Brown/pale pink/pale brown		2	10
290CN ‡ †	Hydrogen cyanide in blood	HCN	2~30mg/L	1	Yellow	Red	Screening test for cause identification of one's death	2	2 × 5
290CO †	Carbon monoxide in blood	CO	20~90%COHb	1	Yellow	Blackish brown		1	2 × 5
290EA †	Ethyl alcohol in blood	C ₂ H ₅ OH	0.2~2.0mg/mL	3	Pink	Pale blue		1	2 × 5
290HS ‡ †	Hydrogen sulphide in blood	H ₂ S	0.1~1.0µg/mL	1	Pale yellow	Pink		1	2 × 5
290PQ	Paraquat dichloride in blood-qualitative	CH ₃ (C ₅ H ₄ N) ₂ CH ₃ Cl ₂		—	White	Blue		3	10

‡ This tube must be stored in a refrigerated place (0-10 °C/32-50 °F).
† Air flow control orifice is required.

По вопросам продаж и поддержки обращайтесь:

Архангельск (8182)63-90-72 Астана (7172)727-132 Астрахань (8512)99-46-04 Барнаул (3852)73-04-60 Белгород (4722)40-23-64 Брянск (4832)59-03-52 Владивосток (423)249-28-31 Волгоград (844)278-03-48 Вологда (8172)26-41-59 Воронеж (473)204-51-73 Екатеринбург (343)384-55-89	Иваново (4932)77-34-06 Ижевск (3412)26-03-58 Казань (843)206-01-48 Калининград (4012)72-03-81 Калуга (4842)92-23-67 Кемерово (3842)65-04-62 Киров (8332)68-02-04 Краснодар (861)203-40-90 Красноярск (391)204-63-61 Курск (4712)77-13-04 Липецк (4742)52-20-81	Магнитогорск (3519)55-03-13 Москва (495)268-04-70 Мурманск (8152)59-64-93 Набережные Челны (8552)20-53-41 Нижний Новгород (831)429-08-12 Новокузнецк (3843)20-46-81 Новосибирск (383)227-86-73 Омск (3812)21-46-40 Орел (4862)44-53-42 Оренбург (3532)37-68-04 Пенза (8412)22-31-16	Пермь (342)205-81-47 Ростов-на-Дону (863)308-18-15 Рязань (4912)46-61-64 Самара (846)206-03-16 Санкт-Петербург (812)309-46-40 Саратов (845)249-38-78 Севастополь (8692)22-31-93 Симферополь (3652)67-13-56 Смоленск (4812)29-41-54 Сочи (862)225-72-31 Ставрополь (8652)20-65-13	Сургут (3462)77-98-35 Тверь (4822)63-31-35 Томск (3822)98-41-53 Тула (4872)74-02-29 Тюмень (3452)66-21-18 Ульяновск (8422)24-23-59 Уфа (347)229-48-12 Хабаровск (4212)92-98-04 Челябинск (351)202-03-61 Череповец (8202)49-02-64 Ярославль (4852)69-52-93
---	--	---	--	---

Единый адрес: kwg@nt-rt.ru | http://kitagawa.nt-rt.ru